
# ALP20A222BB063

Not for New Design

ALP20, Aluminum Electrolytic, 2,200 uF, -10/+30%, 63 VDC, -40/+85°C, 7.5 mm

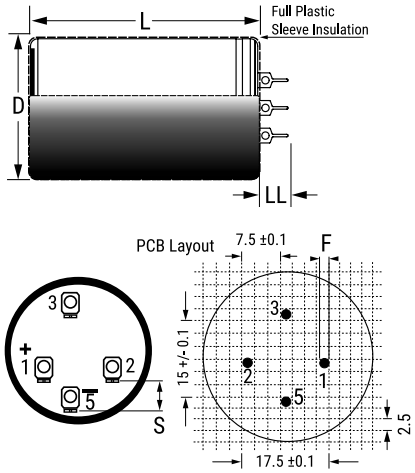


Click here for the 3D model.

| General Information | |
|---|---|
| Series | ALP20 |
| Dielectric | Aluminum Electrolytic |
| Description | Solder Pin, Aluminum Electrolytic |
| Features | Solder Pin |
| RoHS | Yes |
| Lead | 4 Pin Solder |
| Typical Component Weight | 50 g |
| Notes | Dimensions D And L Include Sleeving. |
| Shelf Life | 156 Weeks |

| Dimensions | |
|---|---|
| D | 30mm +/-1mm |
| L | 45mm +/-2mm |
| S | 7.5mm +/-0.1mm |
| LL | 7.5mm +/-0.5mm |
| F | 1.3mm |

| Packaging Specifications | |
|---|---|
| Sleeving | Yes |
| Packaging | Tray |

| Specifications | |
|---|---|
| Capacitance | 2,200 uF |
| Tolerance | -10/+30% |
| Voltage DC | 63 VDC, 72.45 VDC (Surge) |
| Temperature Range | -40/+85°C |
| Rated Temperature | 85°C |
| Life | 15000 Hrs |
| Leakage Current | 832 uA (5min 20°C) |

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006 - 2026 YAGEO