CA064X100K5GACTU

Aliases (CA064X100K5GAC7800)

Obsolete

Array Comm C0G Flex, Ceramic, 10 pF, 10%, 50 VDC, C0G, SMD, MLCC, Array, Flex Termination, Class II, 0612 / 1632

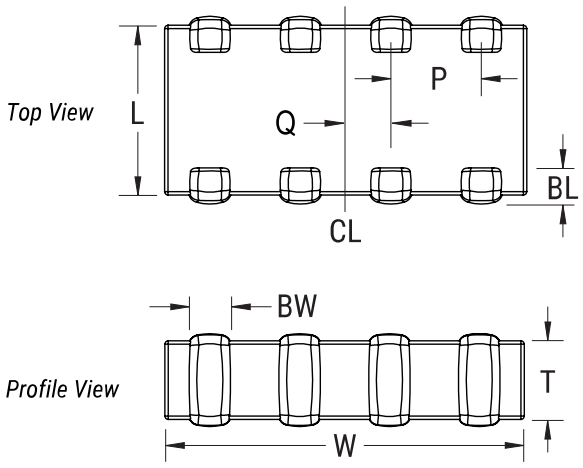

Click here for the 3D model.

General Information	
Series	Array Comm C0G Flex
Style	SMD Array
Description	SMD, MLCC, Array, Flex Termination, Class II
RoHS	Yes
Termination	Flexible Termination
MSL	1
Case Code (EIA / mm)	0612 / 1632

Dimensions	
L	1.6mm +/-0.2mm
W	3.2mm +/-0.2mm
T	0.8mm +/-0.10mm
P	0.8mm +/-0.10mm

Packaging Specifications	
Packaging	T&R, 180mm, Paper Tape
Packaging Quantity	4000

Specifications	
Capacitance	10 pF
Tolerance	10%
Voltage DC	50 VDC
Temperature Range	-55/+125°C
Temp. Coefficient	C0G
Dissipation Factor	0.1% 1 MHz 1.0Vrms
Insulation Resistance	100 GOhms