

EMI Common Mode Choke

Automotive Grade

APPI Series



Overview

An EMI common mode choke (CMC) for power lines is a passive component specifically designed to suppress electromagnetic interference (EMI) in power supply circuits

A full series of common mode choke is designed for excellent noise attenuation with compact sizing for use in wide range of applications. Both standard series and custom designs are available.

Benefits

1. Automotive DC Power Line Common Mode Filter
2. Operating temperature range — 40°C ~ 125°C
3. Excellent solderability

Applications

1. Networking
2. EMI solutions for charger
3. Media player, Dashboard
4. Infotainment

Product Information

Series	Size Code (JIS/EIA)	Impedance(Ω)
APPI	4850/1920	100 ~ 1500




APPI00050525 Series Specification

AEC-Q200

1 Scope: This specification applies to the Pb Free Common mode filters

2 Part Numbering:

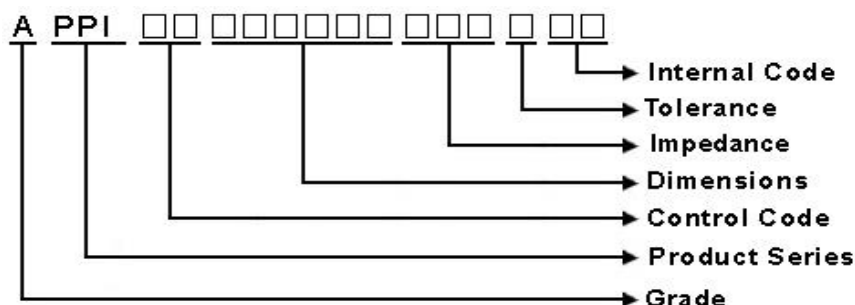


3 Rating:

Operating Temperature: - 40°C ~ + 125°C (Including self temp. rise)
 Storage Temperature: - 40°C ~ + 125°C (For after the circuit board is mounted)
 Storage Temperature: (on tape & reel): -20°C to +40°C; 75% RH max

4 Standard Testing Condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

5 Configuration and Dimensions and Unit Weight:

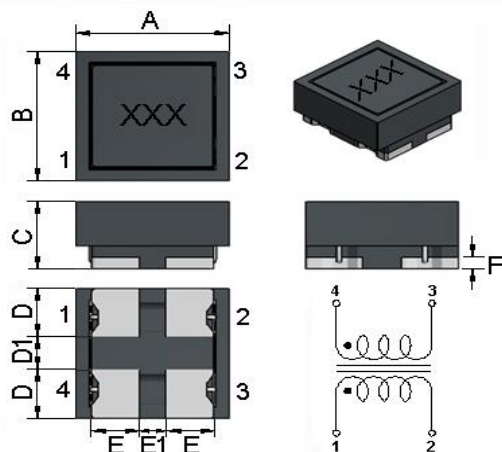

Ex Marking:102
 Marking Color: Black

A: 4.8±0.20	mm
B: 5.0±0.20	mm
C: 2.5 Max.	mm
D: 1.90 Typ.	mm
D1: 1.20 Typ.	mm
E: 1.35 Typ.	mm
E1: 0.80 Typ.	mm
F: 0.45 Typ.	mm

Net Weight (grms)

SIZE CODE	Net Weight (grms)
050525	0.213(typ.)

APPI00050525 Series Specification

AEC-Q200


6 Electrical Characteristics:

Part No.	Impedance(Ω) Min. @10MHz,0.5V	Impedance(Ω) Typ. @100MHz,0.5V	RDC (m Ω)	Irms (A)Max.	Rated Voltage (V)Max.	Withstanding voltage (V)Max.	Insulation Resistance (M Ω)Min.	Marking
BPPI00050525101X00	10	100	9 $\pm$ 40%	6.0	50	125	10	101
BPPI00050525251X00	20	250	14 $\pm$ 40%	5.0	50	125	10	251
BPPI00050525501X00	30	500	19.0Max.	4.0	50	125	10	501
BPPI00050525102X00	60	1000	24 $\pm$ 40%	2.0	50	125	10	102
BPPI00050525142X00	100	1400	40 $\pm$ 40%	1.5	50	125	10	142
BPPI00050525152X00	—	1500	40 $\pm$ 40%	1.5	50	125	10	152

NOTE:

1.Irms : Based on temperature rise (ΔT : 40°C Typ.)

7.1 Construction:

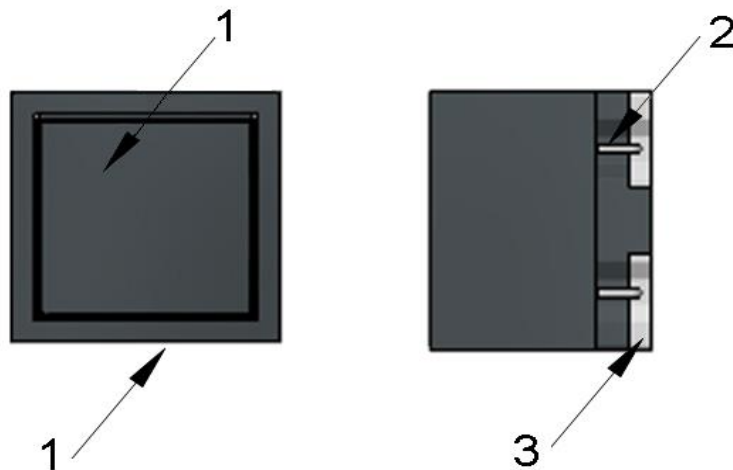


7.2 Material List:

NO	Part	Material
1	Core	Ferrite
2	Wire	Magnet Wire
3	Terminal	Ag/Ni/Sn

TEST EQUIPMENT


1. Impedance

Measured by using HP4291B RF Impedance Analyzer.

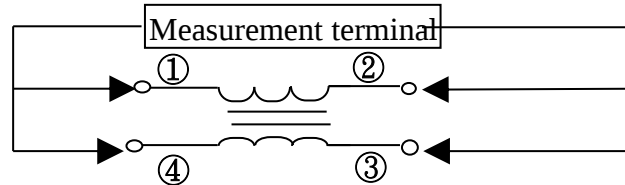


2. Inductance

Measured by using HP4284A PRECISION LCR METER.

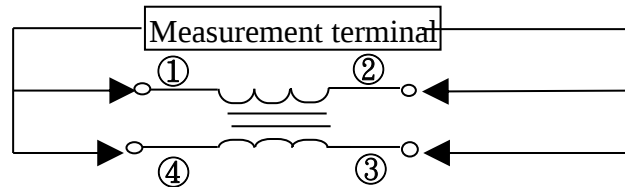

3. DC Resistance


Measured by using Chroma 16502 milliohm meter.

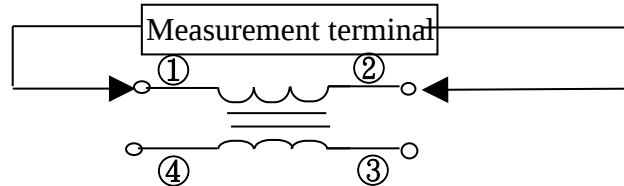

4. Insulation Resistance

Measured by using Chroma 19073



Measurement voltage : 50V , Measurement time : 3 sec.

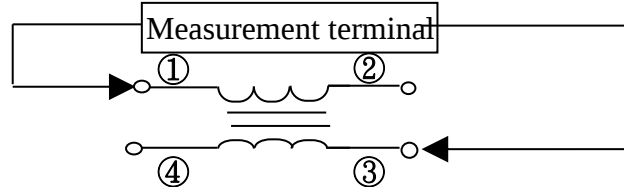

APPI00050525 Series Specification

AEC-Q200

MECHANICAL

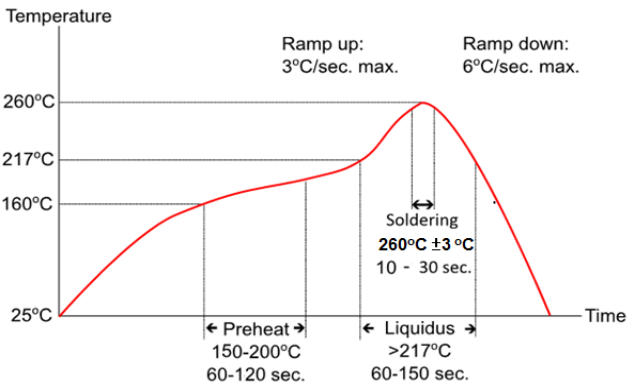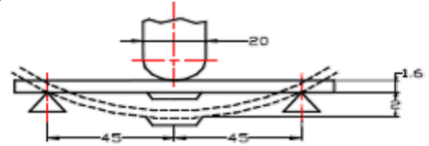TEST ITEM	SPECIFICATIONS	TEST CONDITIONS
Solderability	No more than 5% of the solderable metalization exposed underlying, non-wettable base metal or metallization layers or portions of the ceramic substrate after exposure to molten solder.	Refer to J-STD-002 For both Leaded & SMD. Electrical Test not required. Test Method B @ 245±5°C, dwell for 5+0/-0.5 seconds
Resistance to Soldering heat (reflow soldering)	There shall be no damage or problems.	Temperature profile of reflow soldering  Note: - Re-Flow Possible times: within 2 times - Nitrogen adopted is recommended while in re-flow
Terminal strength	The terminal electrode and the ferrite must not be damaged.	With the component mounted on a PCB obtained from the Supplier with the device to be tested, apply a 17.7 N (1.8 Kg) force to the side of a device being tested. This force shall be applied for 60 +1 seconds. Also the force shall be applied gradually as not to apply a shock to the component being tested.
Strength on PC board bending	The terminal electrode and the ferrite must not be damaged.	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 60 sec 
High Temperature Exposure (Storage)	Impedance: Within ±20% of the initial value. Insulation resistance and DC resistance on the specification shall be met. The terminal electrode and the ferrite must not be damaged.	1000hrs. at rated operating temperature, part can be stored for 1000 hrs. @ 155°C. Unpowered. Measurement at 24±4 hours after test conclusion.

APPI00050525 Series Specification


AEC-Q200

ENVIRONMENT CHARACTERISTICS

TEST ITEM	SPECIFICATIONS	TEST CONDITIONS
Humidity Bias	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification shall be met. The terminal electrode and the ferrite must not be damaged.	Precondition: Reflow peak temperature 260°C 3 times. (Reference: J-STD-020) 1000 hours 85°C/85%RH. Unpowered. Measurement at 24 $\pm$ 4 hours after test conclusion.
Vibration	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification shall be met. The terminal electrode and the ferrite must not be damaged.	MIL-STD-202 Method 204 5 g's for 20 minutes, 12 cycles each of 3 orientations. Test from 10-2000Hz.
Temperature Cycling	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification shall be met. The terminal electrode and the ferrite must not be damaged.	Precondition: Reflow peak temperature 260°C 3 times. (Reference: J-STD-020) 1000 cycles (-55°C to +155°C). Measurement at 24 $\pm$ 4 hours after test conclusion. 30min maximum dwell time at each temperature extreme. 1 min. maximum transition time.
High Temperature Operating Life	Impedance: Within $\pm 20\%$ of the initial value. Insulation resistance and DC resistance on the specification shall be met. The terminal electrode and the ferrite must not be damaged.	Precondition: Reflow peak temperature 260°C 3 times. (Reference: J-STD-020) 1000 hrs. @ 125 °C, apply maximum rated power. Measurement 24 $\pm$ 4 hours after test conclusion.
Physical Dimensions	Verify physical dimensions to the applicable component detail specification.	Any applicable method using x10 magnification, micrometers, calipers, gauges, contour projectors, or other measuring equipment, capable of determining the actual specimen dimensions.
Mechanical Shock	1. Electrical characterization- Impedance: Within $\pm 20\%$ change range 2. Appearance-No damage (OM)	Units are non-operating. Pulse shape : Half-sine waveform Impact acceleration : 100 g's Pulse duration : 6 ms Number of shocks : 18 shocks (3 shocks for each face)
Flammability	The marking and A side have no obvious broken, and the marking are clearly	Refer to UL 94 Burning stops within 10 seconds on a vertical specimen; drips of particles allowed as long as they are not inflamed.

8 Packaging:

8.1 Packaging -Cover Tape

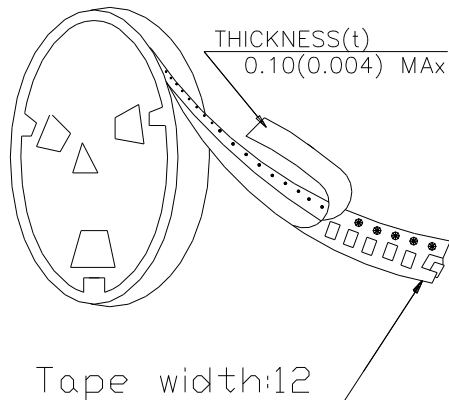


8.2 Packaging Quantity

TYPE	PCS/REEL
050525	2500


8.3 Reel Dimensions

Unit : mm

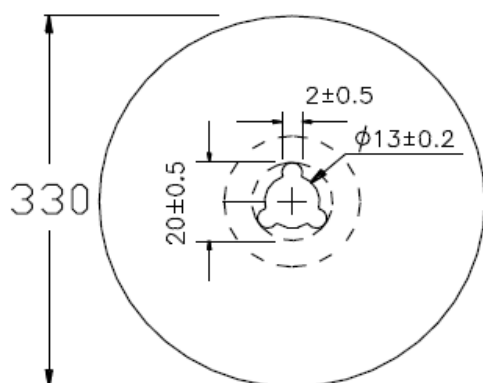


8 Packaging:

8.4 Tape Dimensions in mm

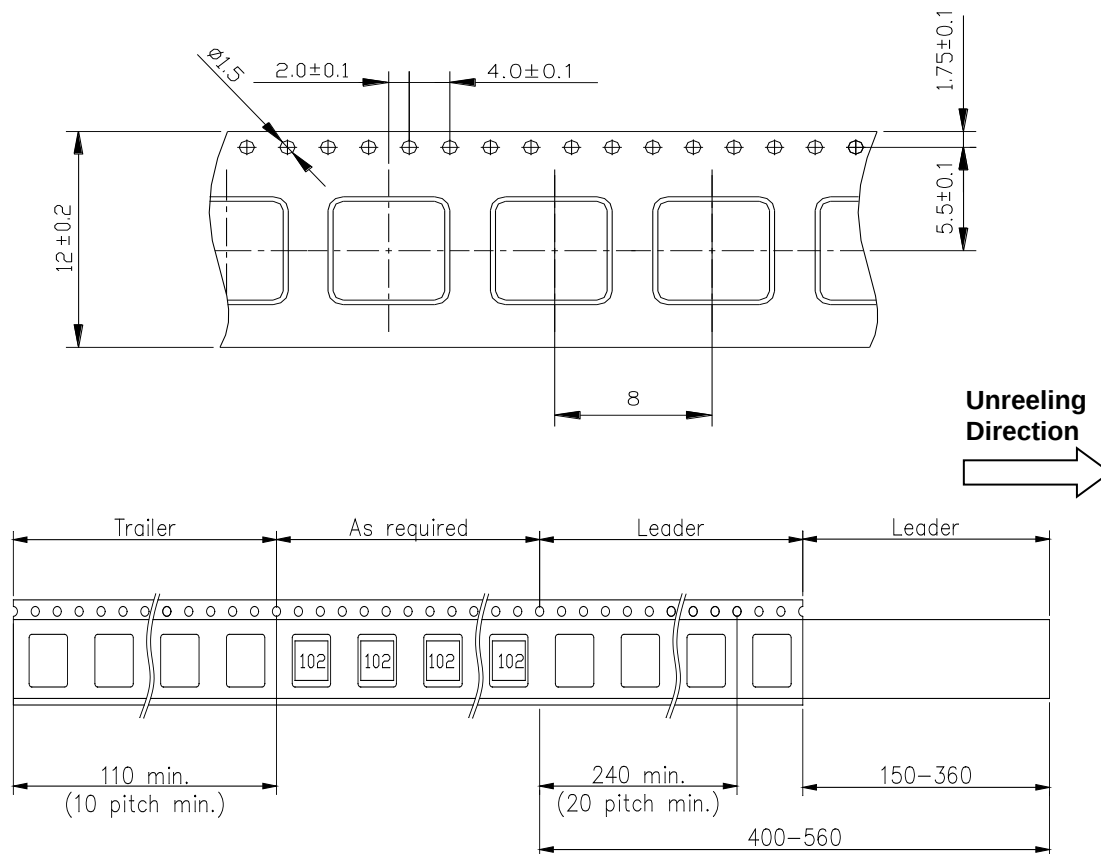

9 Recommended Land Pattern:

(STANDARD PATTERN) Unit : mm

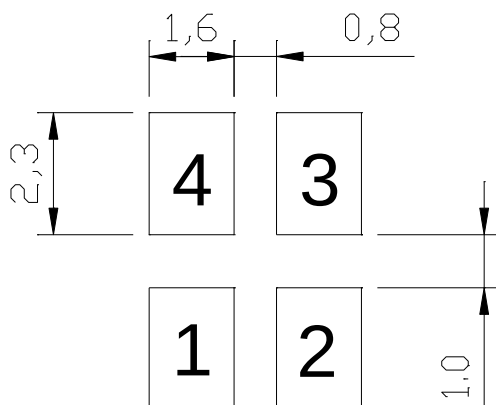


10 Note:

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock or drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.
6. Suggestion

On customer side this product series need to be fixed by the glue after IR reflow.

Please refer to below example photo:




APPI00050525 Series Specification


AEC-Q200

Graph:


APPI00050525101XY0

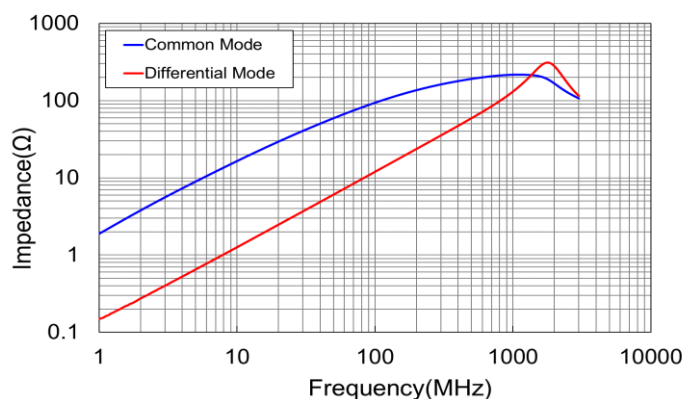


APPI00050525251XY0

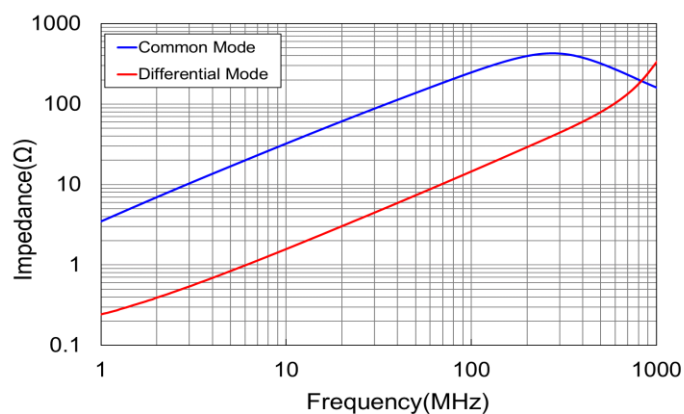


APPI00050525501XY0

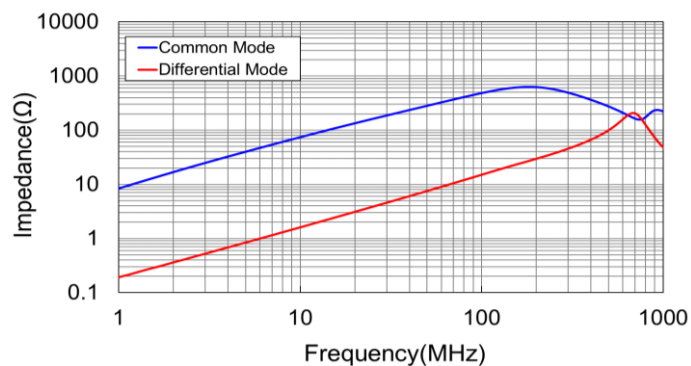

APPI00050525102XY0

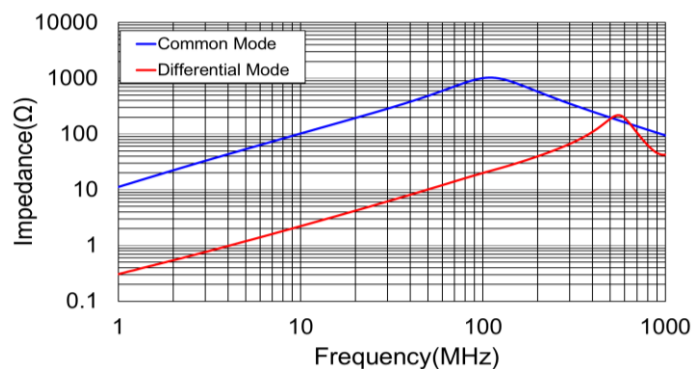

APPI00050525142XY0

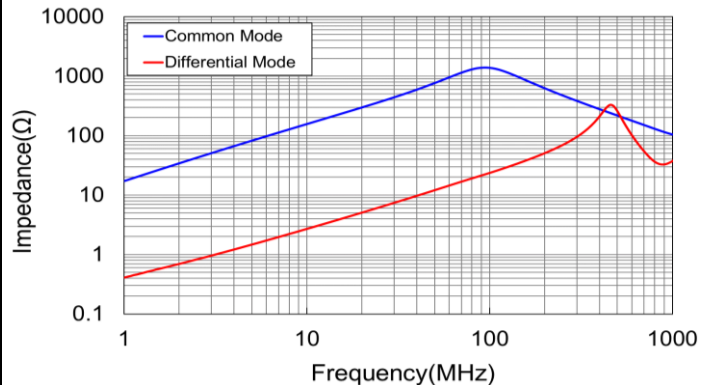

APPI00050525152XY0

