

Power Inductor



BESP Series



Overview

The series is designed specifically to enhance DDR5 application performance. Better ACR value at light load and the DCR value at heavy load. Furthermore, the saturation current performance is also optimal, helping to reduce the ripple current and enhance the efficiency.

Benefits

- 1. High Efficiency
- 2. Higher Isat and lower DCR 、ACR with smaller chip size
- 3. Low coil resistance with large currents

Applications

- 1. Server system
- 2. HDD, SSD
- 3. Network server

Product Information


Series	L (mm)	W(mm)	T (mm)	Inductance (μH)
BESP	2.5	2.0	1.2	0.47 ~ 1.5
	3.2	2.5	1.2	



BESP00322512 Series Specification

1 Scope This specification applies to large current and low loss SMD power inductor

2 Part numbering

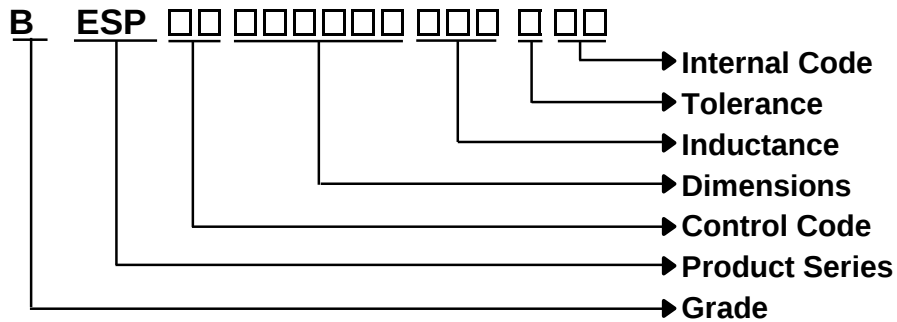

3 Temperature rating

Operating Temperature: - 55°C~125°C

Storage Temperature: (on tape & reel): -20°C to +40°C; 75% RH max.

4 Marking


No Marking

5 Standard testing condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

BESP00322512 Series Specification

6 Configuration and dimensions

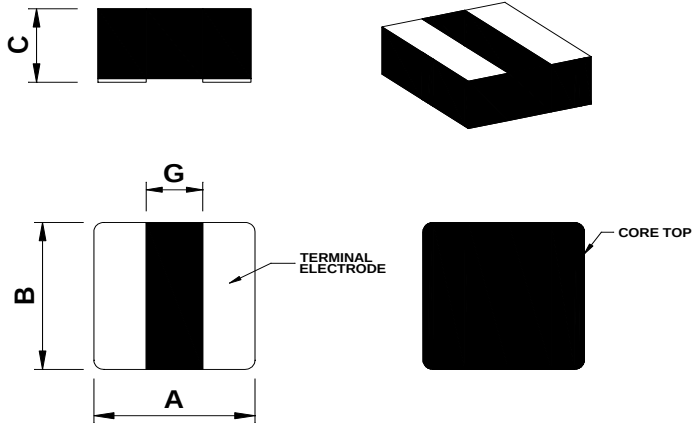

Dimensions in mm

Type	322512
A	3.2 ± 0.2
B	2.5 ± 0.2
C	1.2 Max
G	1.2 Typ

Size Code	Net Weight(Grams)
322512	0.065 Typ

7 Electrical characteristics

Part number	Inductance (μ H)	Tolerance ($\pm$ %)	Test Freq.	I _{rms} (A) Max.(Typ.)	I _{sat} (A) Max.(Typ.)	RDC(m Ω) Max.(Typ.)
BESP00322512R47MJS	0.47	20	1MHz,1V	6.0(6.5)	5.6(6.2)	12.0(10.5)
BESP00322512R68MJS	0.68	20	1MHz,1V	5.5(6.0)	4.2(4.6)	16.5(14.0)


Note:

- Operating temperature range -55°C to 125°C.
- I_{sat} for Inductance drop 30% from its value without current.
- I_{rms} for a 40°C temperature rise from 25°C ambient.
- The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.
Circuit design 125°C under worst case operating conditions. Component placement, PWB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Absolute maximum voltage 15V DC. (Based on test method, it may not the same under different application, it is recommended to verify first.)

BESP00322512 Series Specification

8 BESP00322512 Series

8.1 Construction

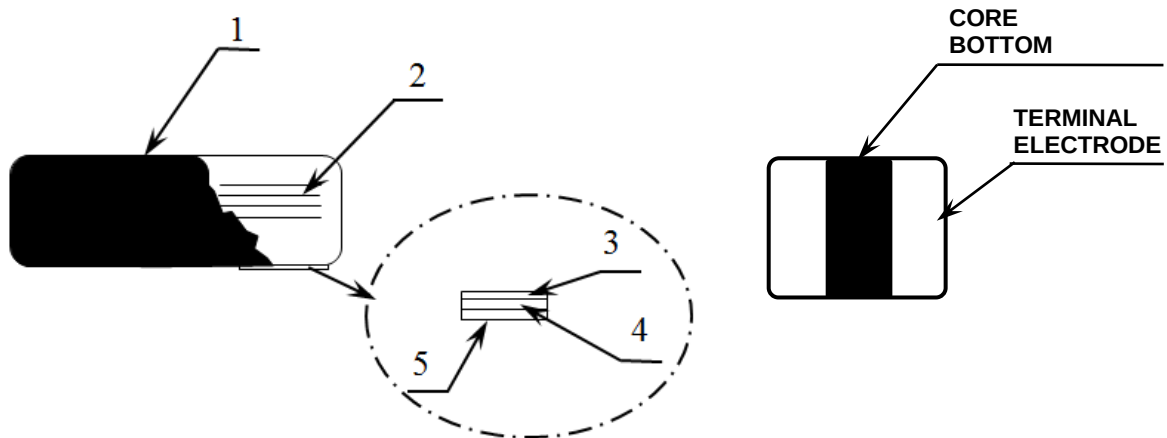



8.2 Material list

Item	Part	Description
1	Magnetic core	Magnetic metal powder
2	Coil	Enameled copper wire
3	Plating	Cu
4	Plating	Ni
5	Plating	Sn

BESP00322512 Series Specification

9 Reliability test items

9-1.Mechanical Performance


No	Item	Specification	Test Method
9-1-1	Flexure Strength	The forces applied on the right conditions must not damage the terminal electrode and the metal body	Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 30sec 
9-1-2	Vibration	Appearance: No damage (for microscope of CASTOR MZ-45 20X) Inductance change shall be within $\pm 20\%$	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
9-1-3	Resistance to Soldering Heat	Appearance: No damage More than 75% of the terminal electrode should be covered with solder. Inductance: within $\pm 20\%$ of initial value	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 260 ± 5 °C Immersion Time: 10 ± 1 sec
9-1-4	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: 245 ± 5 °C Immersion Time: 4 ± 1 sec
9-1-5	Terminal Strength Test	No split termination  Chip Mounting Pad	Test device shall be soldered on the substrate, then apply a force in the direction of the arrow. Force : 5N Keeping Time: 10 ± 1 sec

9-2.Environmental Performance

No		Item	Specification	Test Method		
9-2-1	Temperature Cycle		Appearance: No damage Inductance:within±20% of initial value	One cycle:		
				Step	Temperature (℃)	Time (min)
				1	-55±3	30
				2	25±2	3
				3	125±3	30
				4	25±2	3
Total: 100cycles						
Measured after exposure in the room condition for 24hrs						
9-2-2	Humidity Resistance		Temperature: 60±2℃ Relative Humidity: 90 ~ 95% / Time: 500hrs Measured after exposure in the room condition for 24hrs			
9-2-3	High Temperature Resistance		Temperature: 85±3℃ Relative Humidity: 0% / Time: 500hrs Measured after exposure in the room condition for 24hrs			
9-2-4	Low Temperature Resistance		Temperature: -55±3℃ Relative Humidity: 0% / Time: 500hrs Measured after exposure in the room condition for 24hrs			

BESP00322512 Series Specification

10 Recommended IR reflow profile

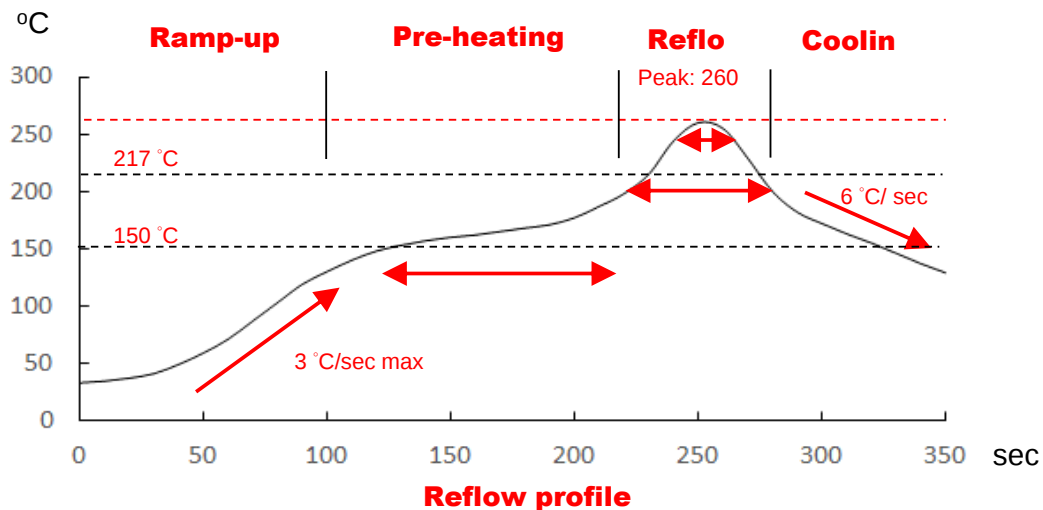

Lead-Free(LF)

Refer to J-STD-020F

Item	Ramp-up	Pre-heating	Reflow	Peak Temp.	Cooling
Temp. scope	R.T. ~150 °C	150 °C~200 °C	217 °C	260±5 °C	Peak Temp. 150 °C
Time spec	-	60~120 sec	60~150 sec	20~40 sec	-

Note:


1. IR reflow times: within 3 times.
2. Nitrogen adopted is recommended while in IR reflow.

BESP00322512 Series Specification

11 Packaging

11.1 Packaging- cover tape


The force for tearing off cover tape is 10 to 130 grams.

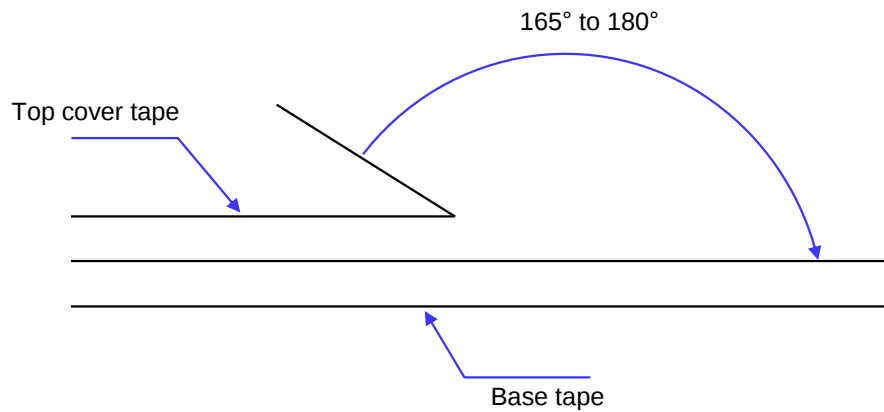

11.2 Packaging quantity

Type	Pcs/Reel
322512	2000

11.3 Reel dimensions

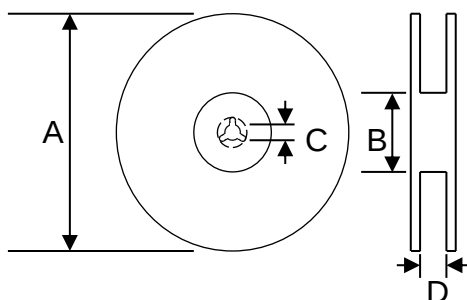


Dimensions in mm

Type	A	B	C	D
322512	178	60	13	8

BESP00322512 Series Specification


11 Packaging

11.4 Tape dimensions in mm

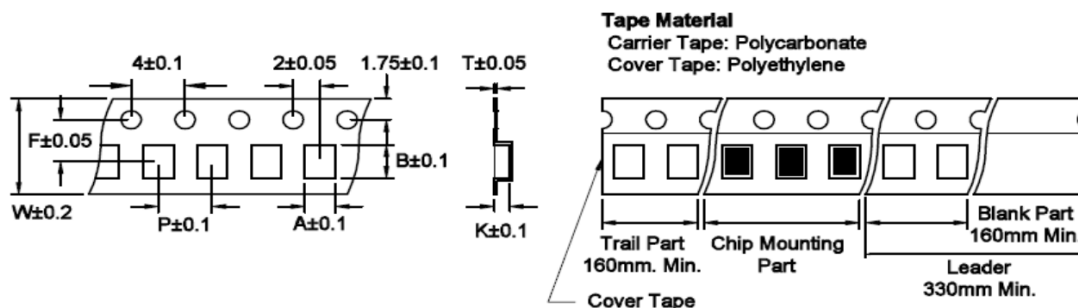

Type	A	B	T	W	P	F	K
322512	2.80	3.50	0.25	8.00	4.00	3.50	1.35

12 Recommended pattern



Dimensions in mm

Type	A	B	C
322512	2.7	1.2	3.4

13 Note

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Don't design/mount any components in contact with this product
3. The moisture sensitivity level (MSL) of products is classified as level 1.
4. Shelf life: 1years from the date of shipment.

BESP00322512 Series Specification

14 Graph

