

# Power Inductor

## BPSD Series



### Overview

Power inductors are passive electronic components used in various circuits to store energy in a magnetic field when electrical current flows through them. They are critical in filtering, energy storage, and noise suppression in power electronic systems. They are designed to handle higher currents and are optimized for minimal power loss and thermal efficiency.

### Benefits

1. Ferrite SMD Shielded Type
2. Unshielded power inductor
3. Various package size and wide inductance range

### Applications

1. Graphic cards
2. DC/DC converters

### Product Information


Series	L (mm)	W(mm)	T (mm)	Inductance (μH)
BPSD	3.3	3.0	1.5	0.15 ~ 8200
	3.3	3.0	2.1	
	4.5	4.0	3.2	
	5.8	5.2	2.5	
	5.8	5.2	3.0	
	5.8	5.2	4.5	
	7.8	7.0	3.5	
	7.8	7.0	5.0	
	10	9.0	4.0	
	10	9.0	5.4	
	10	9.0	6.5	



## BPSD00080750 Series Specification

**1 Scope:** This specification applies to SMD Unshielded Power Inductors

**2 Part Numbering:**

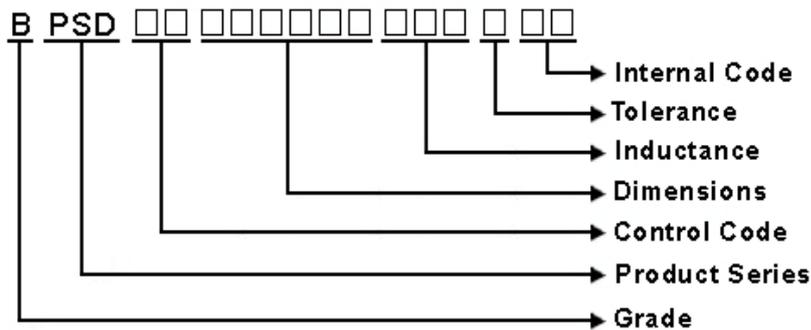


**3 Rating:**

Operating Temperature:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  (Including self temp. rise)

Storage Temperature:  $-40^{\circ}\text{C} \sim +125^{\circ}\text{C}$  (For after the circuit board is mounted)

Storage Temperature: (on tape & reel):  $-20^{\circ}\text{C}$  to  $+40^{\circ}\text{C}$ ; 75% RH max.

**4 Marking:**



Ex Marking : 100


Marking color : Black

**5 Standard Testing Condition**

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

## BPSD00080750 Series Specification

### 6 Configuration and Dimensions:

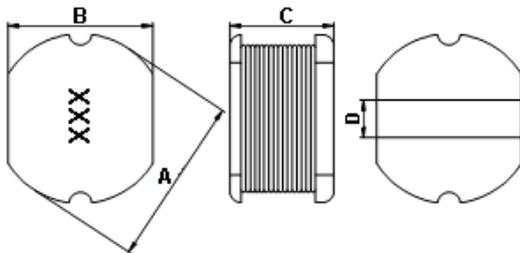

Dimensions in mm

TYPE	080750
A	7.8±0.3
B	7.0±0.3
C	5.0±0.3
D	2.1

### Net Weight (grms)

SIZE CODE	Net Weight (grms)
080750	0.98(Typ.)

### 7 Electrical Characteristics:

Part No.	Inductance (uH)	Test Freq.	RDC (Ω)Max.	Isat (A)	Irms (A)	Tolerance (±%)	Marking
BPSD000807501R4□00	1.4	7.96 MHz,1 V	0.02	3.7	3.7	20	1R4
BPSD000807501R5□00	1.5	7.96 MHz,1 V	0.02	3.7	3.7	20	1R5
BPSD000807501R8□00	1.8	7.96 MHz,1 V	0.02	3.7	3.7	20	1R8
BPSD000807502R2□00	2.2	7.96 MHz,1 V	0.02	3.7	3.7	20	2R2
BPSD000807502R7□00	2.7	7.96 MHz,1 V	0.02	3.7	3.7	20	2R7
BPSD000807503R0□00	3	7.96 MHz,1 V	0.025	3.7	3.7	20	3R0
BPSD000807503R3□00	3.3	7.96 MHz,1 V	0.03	3.7	3.7	20	3R3
BPSD000807503R6□00	3.6	7.96 MHz,1 V	0.03	3.7	3.7	20	3R6
BPSD000807503R9□00	3.9	7.96 MHz,1 V	0.03	3.7	3.7	20	3R9
BPSD000807504R7□00	4.7	7.96 MHz,1 V	0.04	3.5	3.5	10,20	4R7
BPSD000807505R6□00	5.6	7.96 MHz,1 V	0.04	3.3	3.3	20	5R6
BPSD000807506R8□00	6.8	7.96 MHz,1 V	0.04	3.1	3.1	20	6R8
BPSD000807508R2□00	8.2	7.96 MHz,1 V	0.05	2.7	2.7	20	8R2
BPSD00080750100□00	10	2.52 MHz,1 V	0.07	2.3	2.3	10,20	100
BPSD00080750120□00	12	2.52 MHz,1 V	0.08	2	2	20	120
BPSD00080750150□00	15	2.52 MHz,1 V	0.09	1.8	1.8	10,20	150
BPSD00080750180□00	18	2.52 MHz,1 V	0.1	1.6	1.6	20	180
BPSD00080750220□00	22	2.52 MHz,1 V	0.11	1.5	1.5	10,20	220
BPSD00080750270□00	27	2.52 MHz,1 V	0.12	1.3	1.3	20	270
BPSD00080750330□00	33	2.52 MHz,1 V	0.13	1.2	1.2	10,20	330
BPSD00080750390□00	39	2.52 MHz,1 V	0.16	1.1	1.1	10,20	390
BPSD00080750470□00	47	2.52 MHz,1 V	0.18	1.1	1.1	10,20	470
BPSD00080750560□00	56	2.52 MHz,1 V	0.24	0.94	0.94	10,20	560
BPSD00080750680□00	68	2.52 MHz,1 V	0.28	0.85	0.85	10,20	680
BPSD00080750820□00	82	2.52 MHz,1 V	0.37	0.78	0.78	10,20	820

NOTE: □-tolerance K=±10% / M=±20%

1. Operating temperature range - 4 0 °C ~ 1 2 5 °C(Including self - temperature rise)
2. Isat for Inductance drop 10% from its value without current.
3. I rms for a 40 °C temperature rise from 25 °C ambient.


## BPSD00080750 Series Specification

Part No.	Inductance ( $\mu$ H )	Test Freq.	RDC ( $\Omega$ )Max.	Isat (A)	Irms (A)	Tolerance ( $\pm$ %)	Marking
BPSD00080750101□00	100	1 kHz,1 V	0.43	0.72	0.72	10,20	101
BPSD00080750121□00	120	1 kHz,1 V	0.47	0.66	0.66	10,20	121
BPSD00080750151□00	150	1 kHz,1 V	0.64	0.58	0.58	10,20	151
BPSD00080750181□00	180	1 kHz,1 V	0.71	0.51	0.51	10,20	181
BPSD00080750221□00	220	1 kHz,1 V	0.96	0.49	0.49	10,20	221
BPSD00080750271□00	270	1 kHz,1 V	1.11	0.42	0.42	10,20	271
BPSD00080750331□00	330	1 kHz,1 V	1.26	0.4	0.4	10,20	331
BPSD00080750391□00	390	1 kHz,1 V	1.77	0.36	0.36	10,20	391
BPSD00080750471□00	470	1 kHz,1 V	1.96	0.34	0.34	10,20	471
BPSD00080750561□00	560	1 kHz,1 V	2.41	0.32	0.32	10,20	561
BPSD00080750681□00	680	1 kHz,1 V	2.5	0.29	0.29	10,20	681
BPSD00080750102□00	1000	1 kHz,1 V	2.8	0.19	0.19	10,20	102

## BPSD00080750 Series Specification

### 8 BPSD00080750 Series

#### 8.1 Construction:

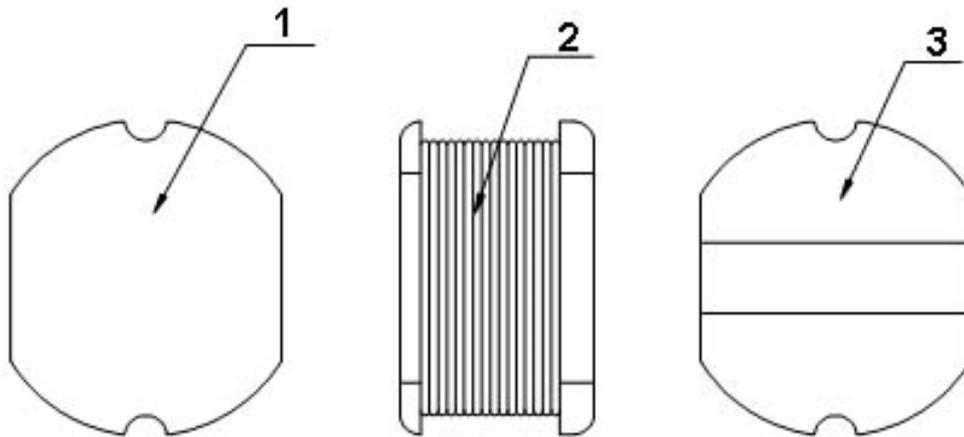

#### 8.2 Material List:

No	Part	Material
1	CORE	FERRITE
2	WIRE	MAGNET WIRE
3	TERMINAL	Ag/Ni/Sn

## BPSD00080750 Series Specification

### 9 Reliability Of Ferrite Wire Wound Power Inductor

#### 1-1.Mechanical Performance


No	Item	Specification	Test Method
1-1-1	Vibration	Appearance: No damage Inductance: within $\pm 10\%$ of initial value	Test device shall be soldered on the substrate Oscillation Frequency: 10 to 55 to 10Hz for 1min Amplitude: 1.5mm Time: 2hrs for each axis (X, Y & Z), total 6hrs
1-1-2	Resistance to Soldering Heat	Appearance: No damage	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 260 $\pm$ 5°C Immersion Time: 10 $\pm$ 1sec
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Pre-heating: 150°C, 1min Solder Composition: Sn/Ag3.0/Cu0.5 Solder Temperature: 245 $\pm$ 5°C Immersion Time: 4 $\pm$ 1sec
1-1-4	Resistance to solvent	There must be no change in appearance or obliteration of marking.	Inductors must withstand 6 minutes of alcohol or water.

#### 1-2.Environmental Performance

No	Item	Specification	Test Method															
1-2-1	Temperature Shock	Appearance: No damage Inductance: within $\pm 10\%$ of initial value	10 cycles (Air to Air) 1 cycles shall consist of: 30 minutes exposure to -55 °C 30 minutes exposure to 125 °C 15 seconds maximum transition between temperatures															
1-2-2	Temperature Cycle		One cycle: <table border="1"> <thead> <tr> <th>Step</th> <th>Temperature (°C)</th> <th>Time (min)</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>-40<math>\pm</math>3</td> <td>30</td> </tr> <tr> <td>2</td> <td>25<math>\pm</math>2</td> <td>3</td> </tr> <tr> <td>3</td> <td>125<math>\pm</math>3</td> <td>30</td> </tr> <tr> <td>4</td> <td>25<math>\pm</math>2</td> <td>3</td> </tr> </tbody> </table>	Step	Temperature (°C)	Time (min)	1	-40 $\pm$ 3	30	2	25 $\pm$ 2	3	3	125 $\pm$ 3	30	4	25 $\pm$ 2	3
Step	Temperature (°C)	Time (min)																
1	-40 $\pm$ 3	30																
2	25 $\pm$ 2	3																
3	125 $\pm$ 3	30																
4	25 $\pm$ 2	3																
1-2-3	Humidity Resistance		Total: 100cycles Measured after exposure in the room condition for 24hrs Temperature: 40 $\pm$ 2°C Relative Humidity: 90 ~ 95% Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-4	Heat Life		Temperature: 85 $\pm$ 3°C Applied Current: Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs															
1-2-5	Cold Resistance		Temperature: -40 $\pm$ 3°C Time: 1000hrs Measured after exposure in the room condition for 24hrs															

## BPSD00080750 Series Specification

### Reflow Soldering Profile

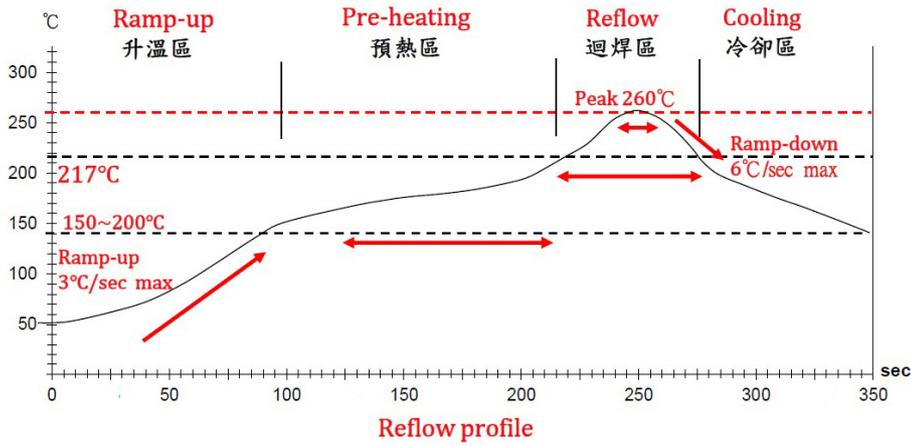

Lead-Free(LF)標準溫度分析範圍

Refer to J-STD-020C


管制項目 Item.	升溫區 Ramp-up	預熱區 Pre-heating	迴焊區 Reflow	Peak Temp	冷卻區 Cooling
溫度範圍 Temp.scope	R.T ~ 150°C	150°C ~ 200°C	217°C	260±5°C	Peak Temp.~150°C
標準時間 Time spec.	-	60 ~ 180 sec	60 ~ 150 sec	20 ~ 40 sec	-
實際時間 Time result	-	75 ~ 100 sec	90 ~ 120 sec	20 ~ 35 sec	-

## BPSD00080750 Series Specification

### 10 Packaging:

#### 10.1 Packaging -Cover Tape


The force for tearing off cover tape is 10 to 130 grams in the arrow direction.

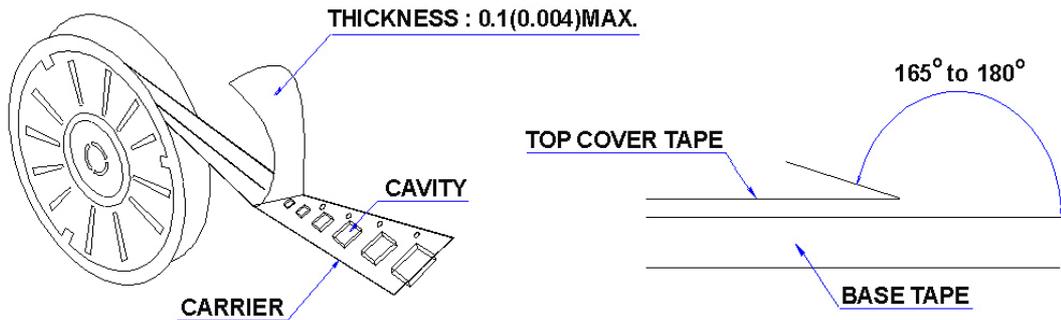

#### 10.2 Packaging Quantity

TYPE	PCS/REEL
080750	700

#### 10.3 Reel Dimensions

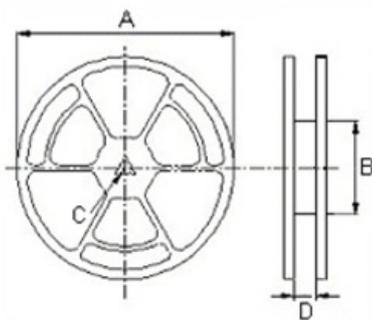


Dimensions in mm

TYPE	A	B	C	D
080750	330	100	13	16

## BPSD00080750 Series Specification


### 10 Packaging:

#### 10.4 Tape Dimensions in mm

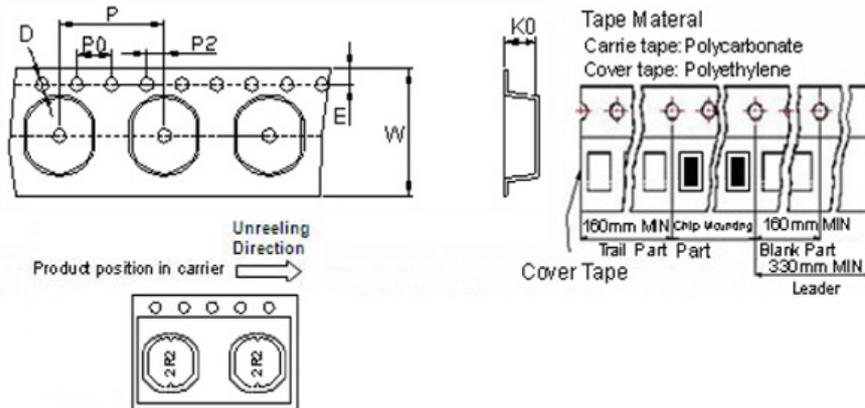

TYPE	K0	D	E	W	P	P0	P2
<b>080750</b>	<b>5.20</b>	<b>1.55</b>	<b>1.75</b>	<b>16</b>	<b>12</b>	<b>4</b>	<b>2</b>

### 11 Recommended Land Pattern:

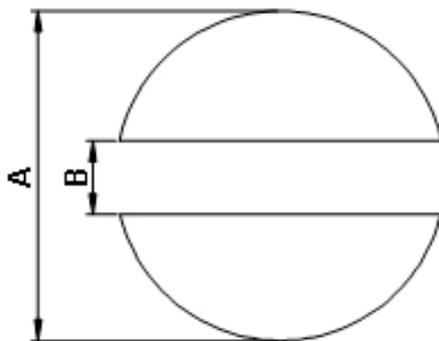

Dimensions in mm

TYPE	A	B
<b>080750</b>	<b>8.8</b>	<b>2.1</b>



### 12 Note:

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Do not knock nor drop.
3. All the items and parameters in this product specification have been prescribed on the premise that our product is used for the purpose, under the condition and in the environment agreed upon between you and us. You are requested not to use our product deviating from such agreement.
4. Please keep the distance between transformer/coil and other components (refer to the standard IEC 950)
5. The moisture sensitivity level (MSL) of products is classified as level 1.



# BPSD00080750 Series Specification

**13** Graph:



BPSD000807501R4□00

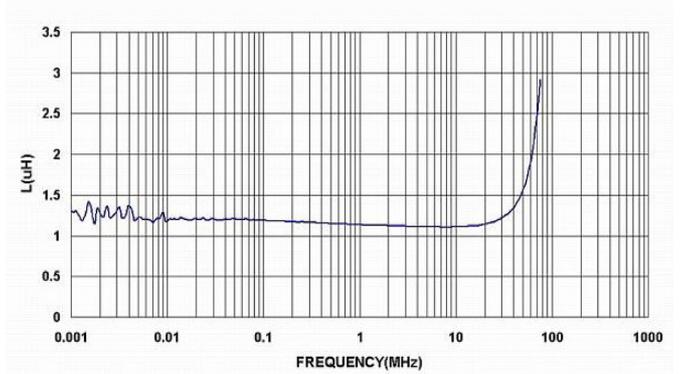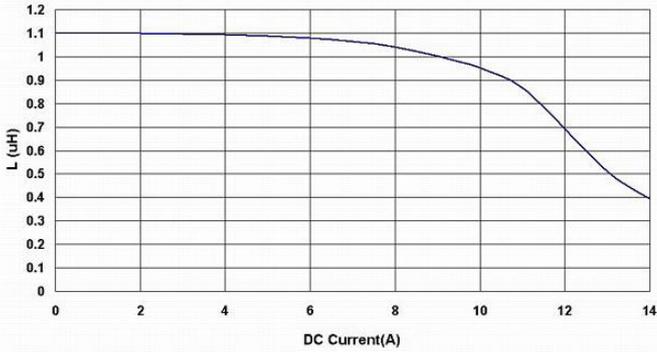



BPSD000807501R5□00

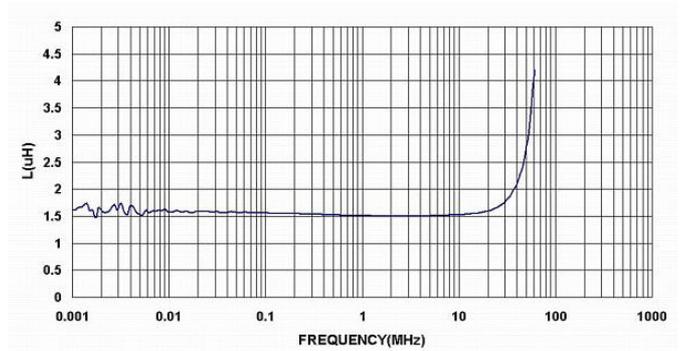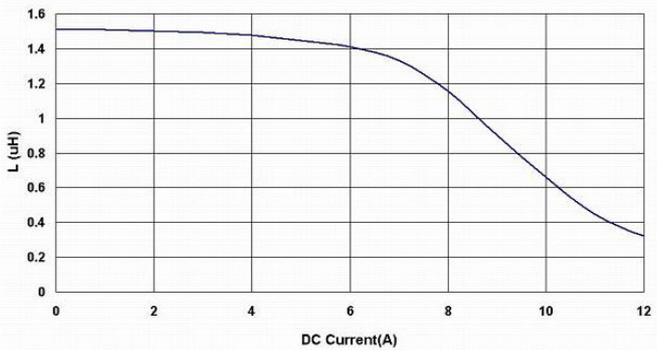

BPSD000807501R8□00

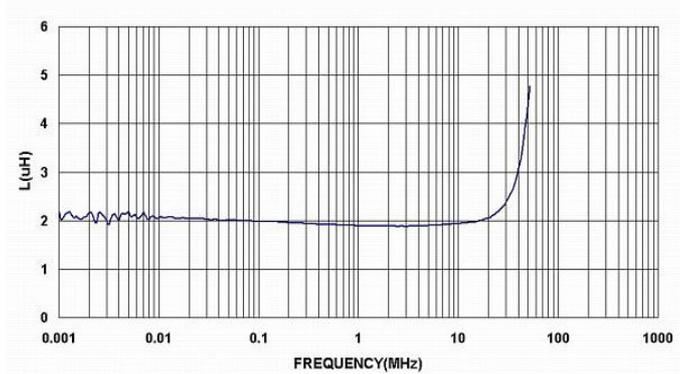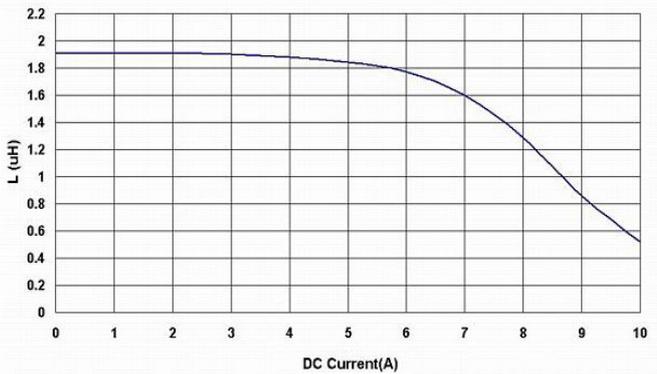



BPSD000807502R2□00

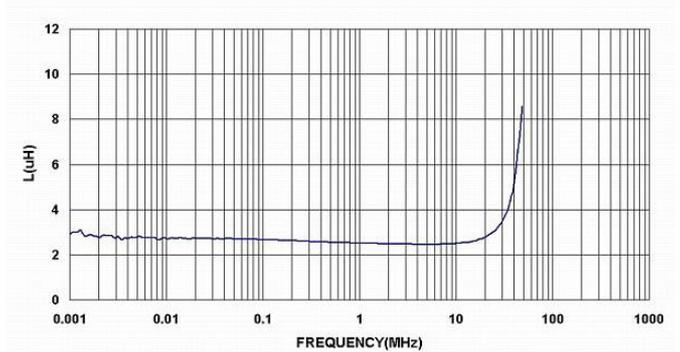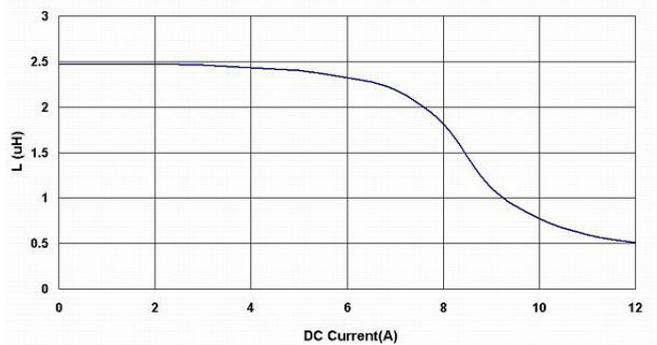



# BPSD00080750 Series Specification

## 13 Graph:



BPSD000807502R7□00

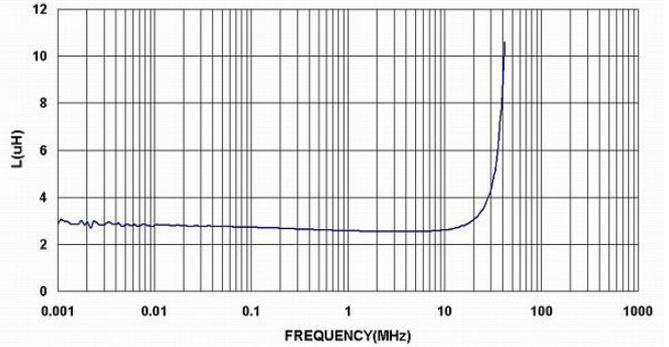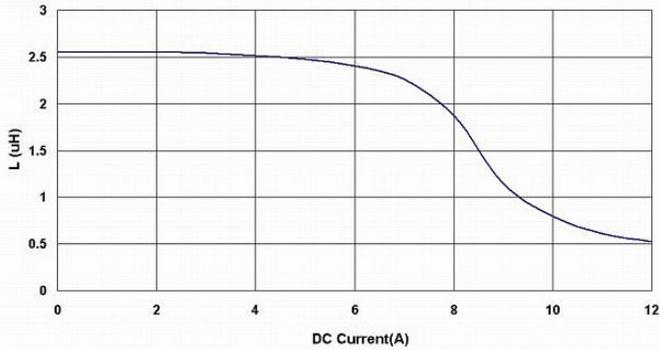



BPSD000807503R3□00

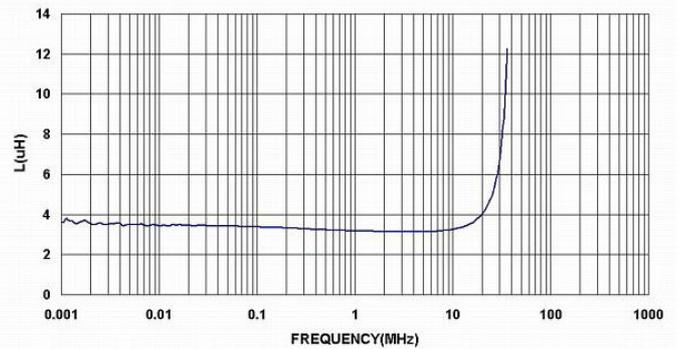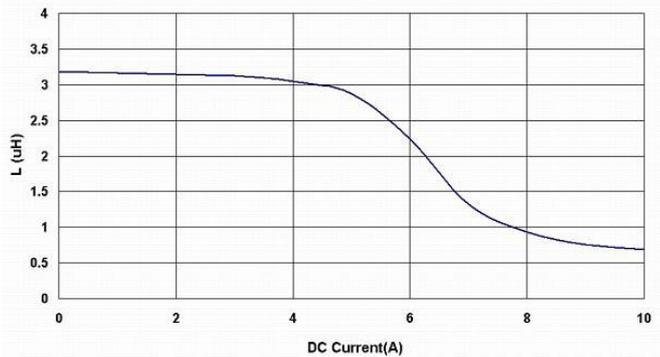

BPSD00080750561□00

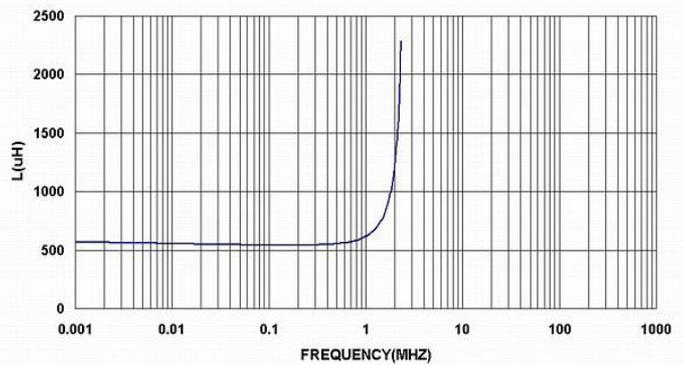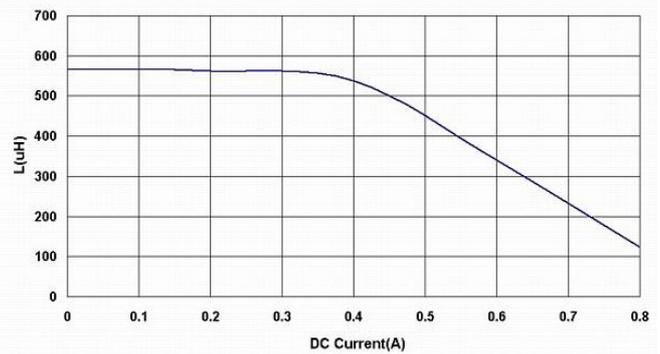



BPSD00080750102□00

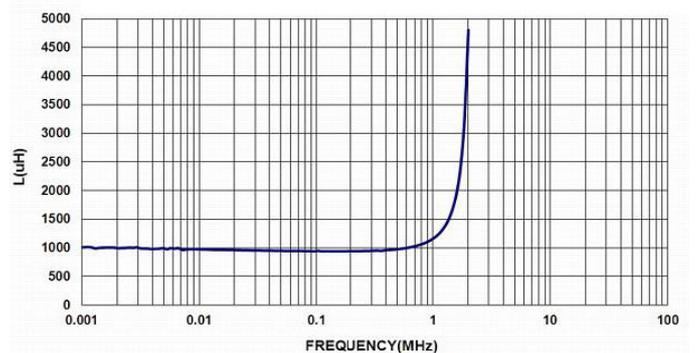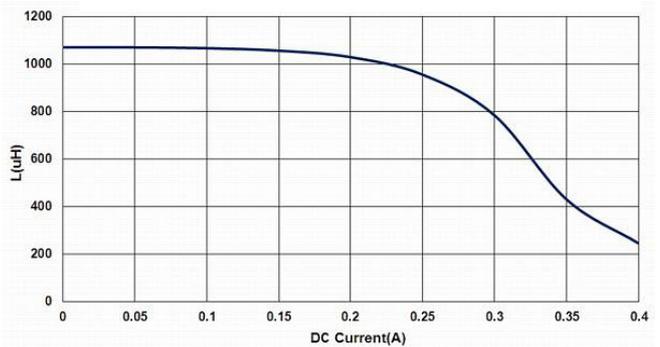



# BPSD00080750 Series Specification

**13** Graph:



BPSD000807503R9□00

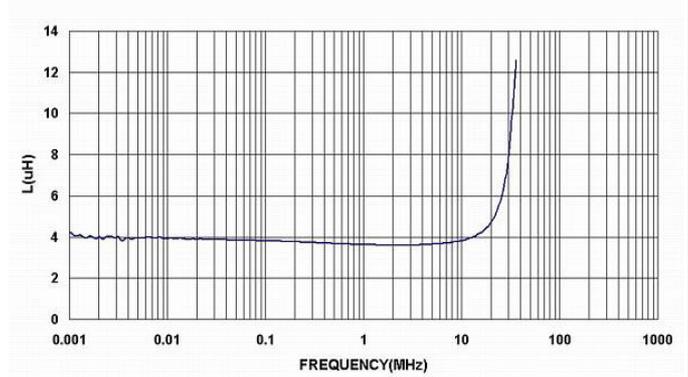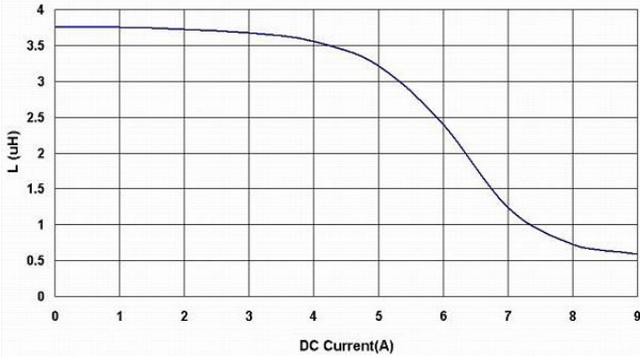


BPSD000807504R7□00

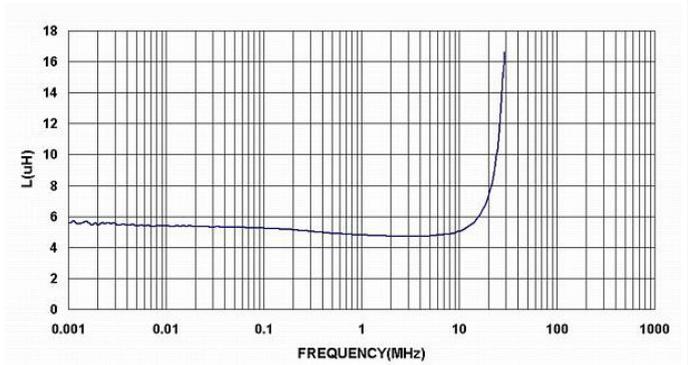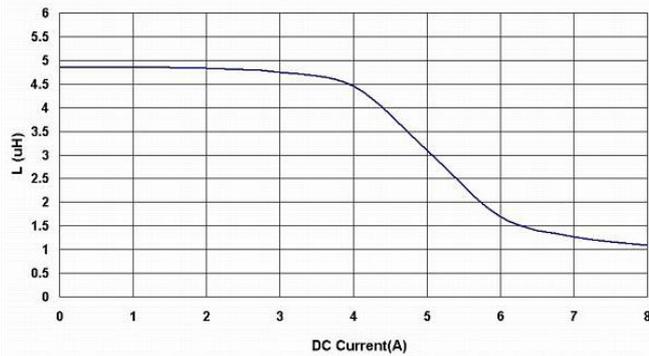

BPSD000807505R6□00

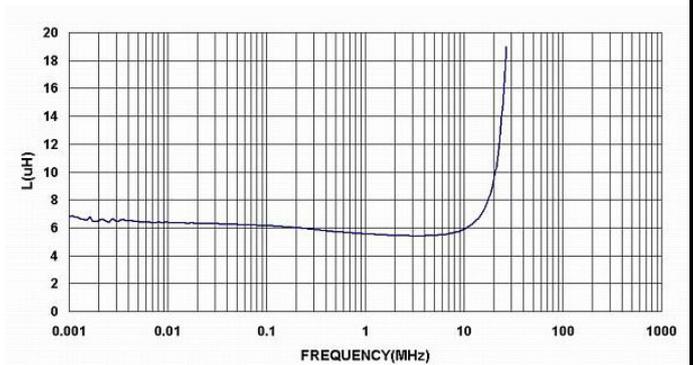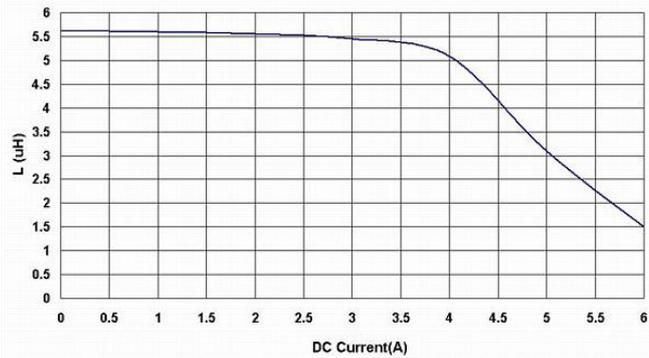



BPSD000807506R8□00

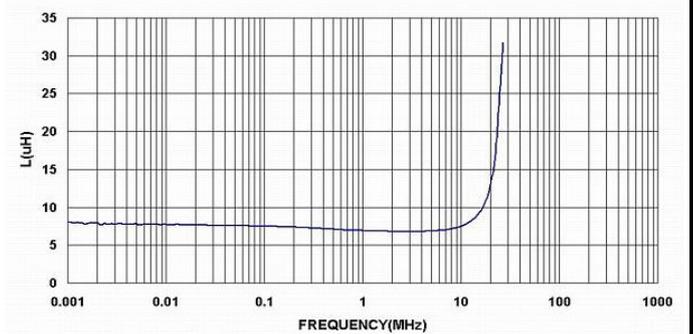



# BPSD00080750 Series Specification

**13** Graph:



BPSD000807508R2□00

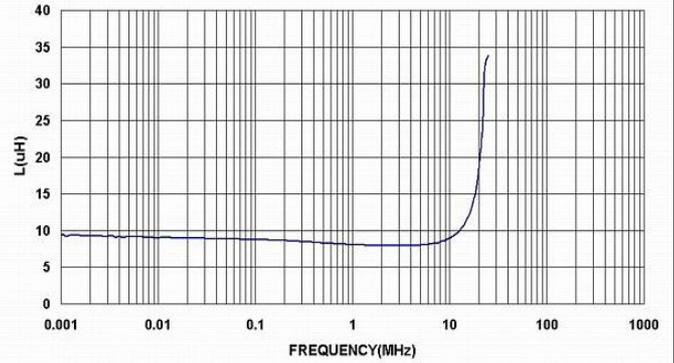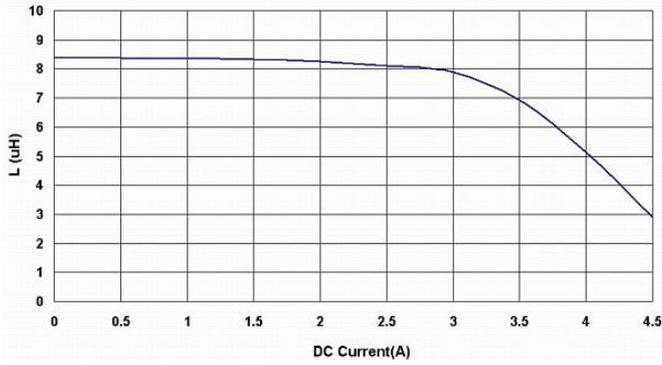



BPSD00080750100□00

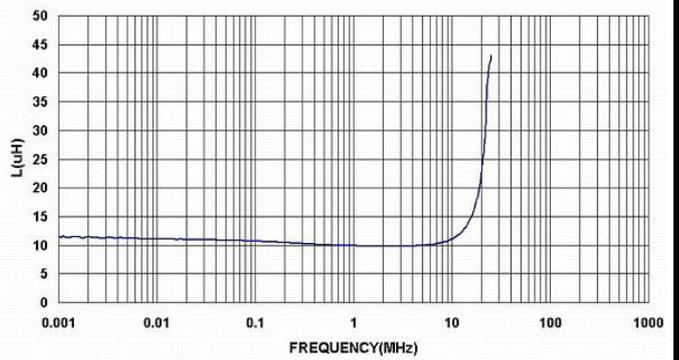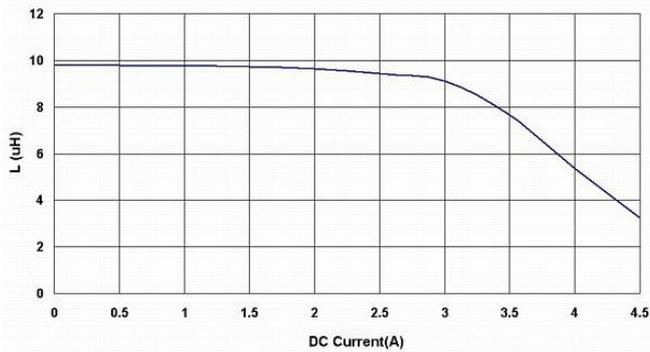

BPSD00080750120□00

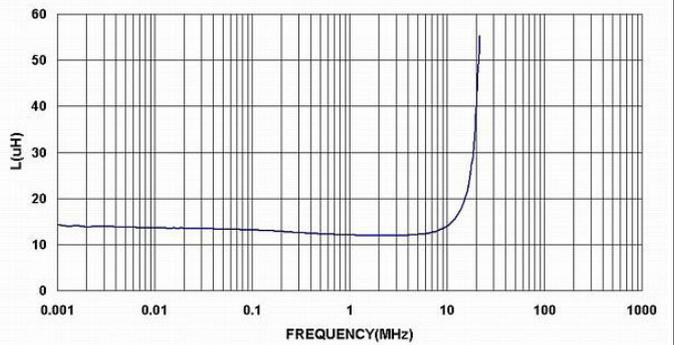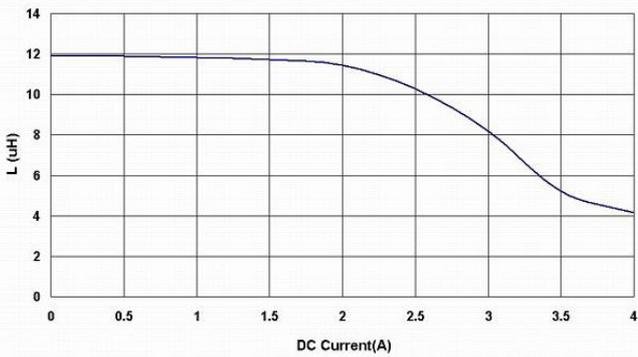



BPSD00080750150□00

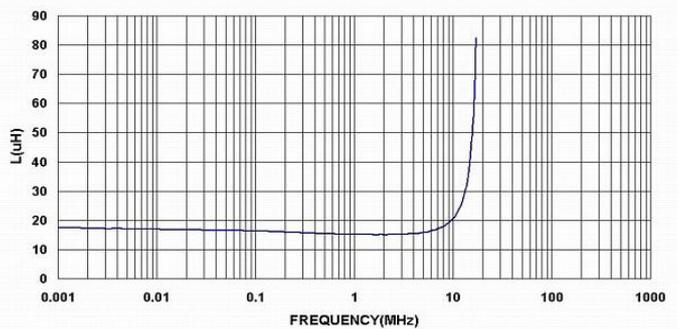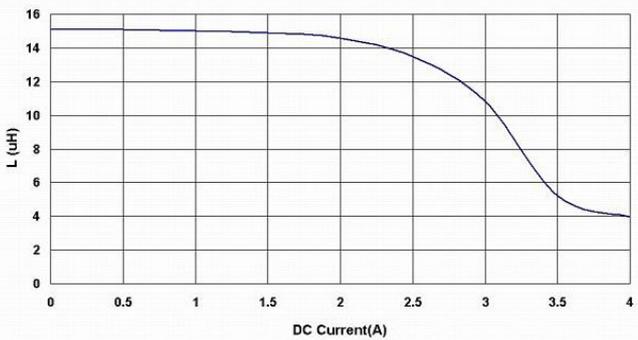



# BPSD00080750 Series Specification

**13** Graph:



BPSD00080750180□00

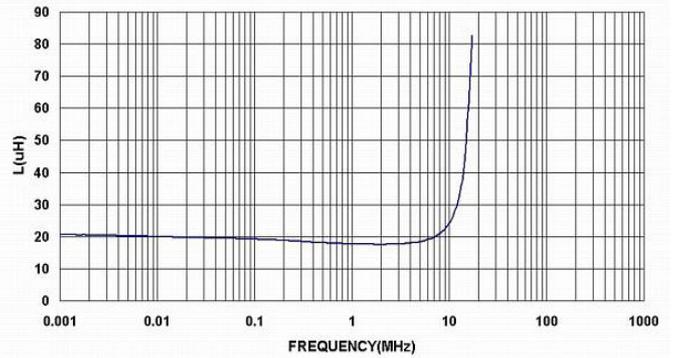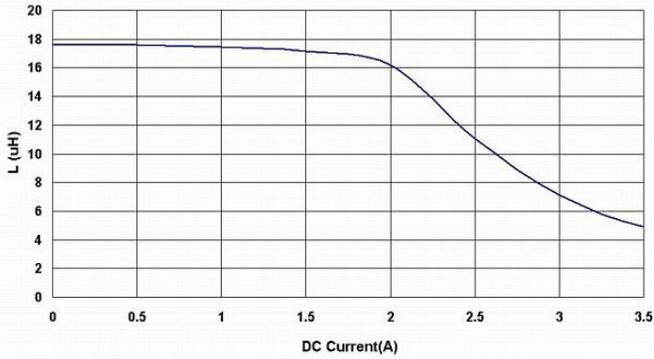



BPSD00080750220□00

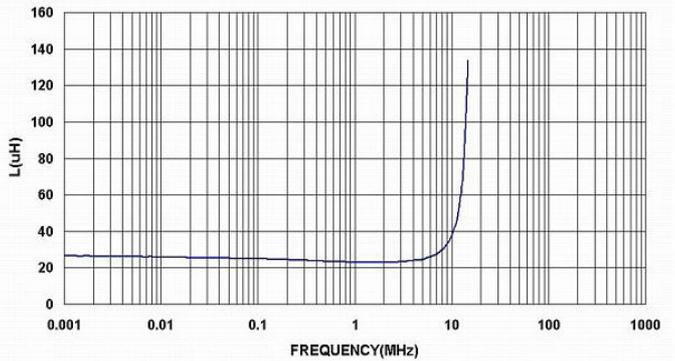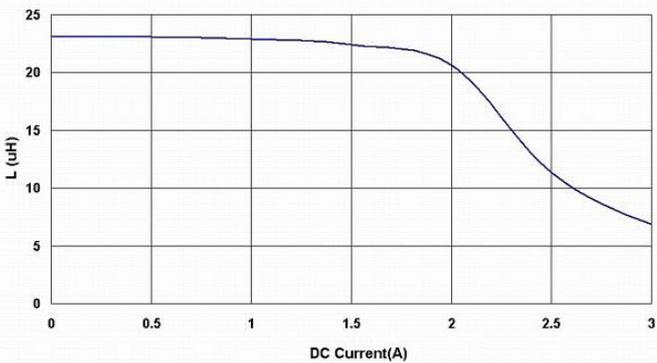

BPSD00080750270□00

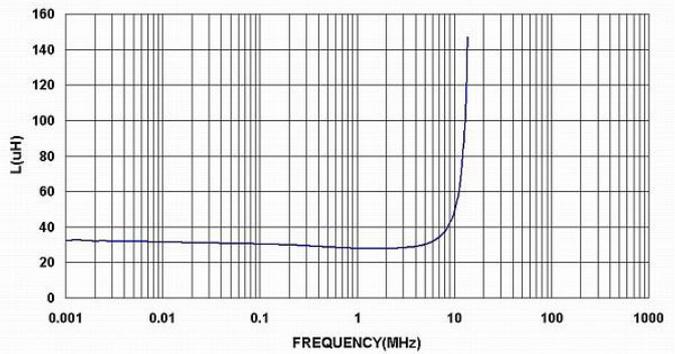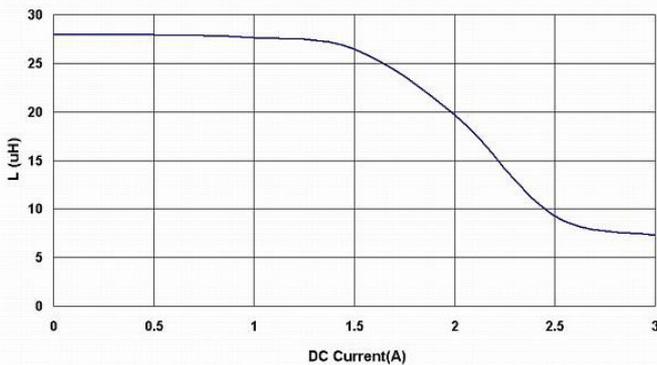



BPSD00080750330□00

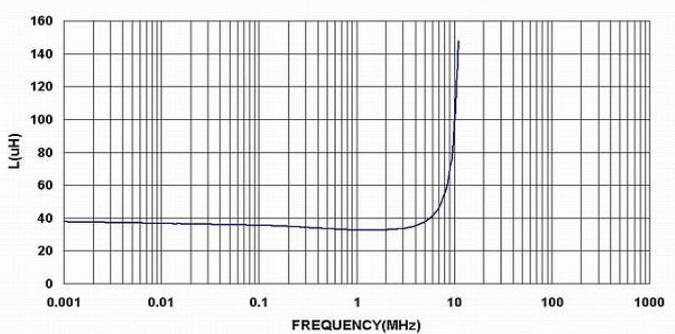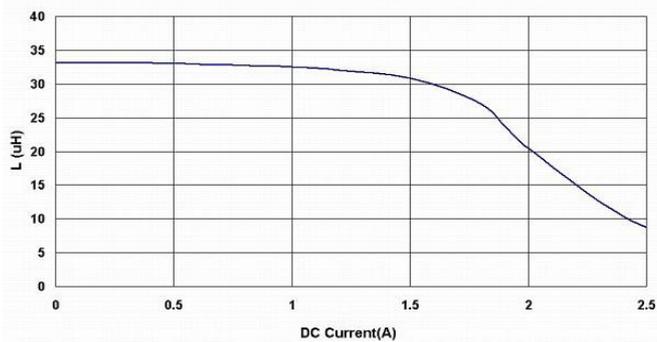



# BPSD00080750 Series Specification

**13** Graph:



BPSD00080750390□00

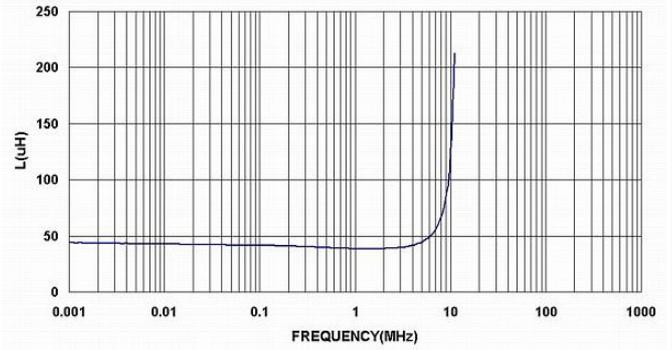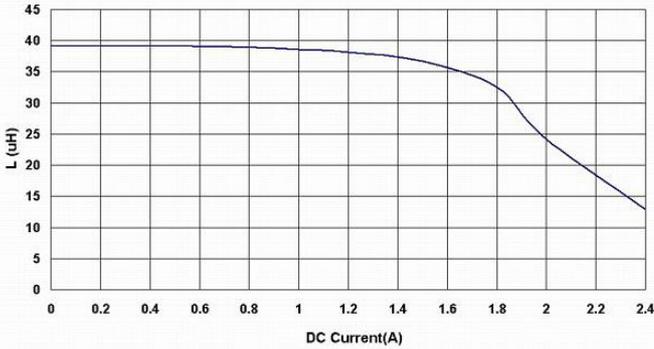



BPSD00080750470□00

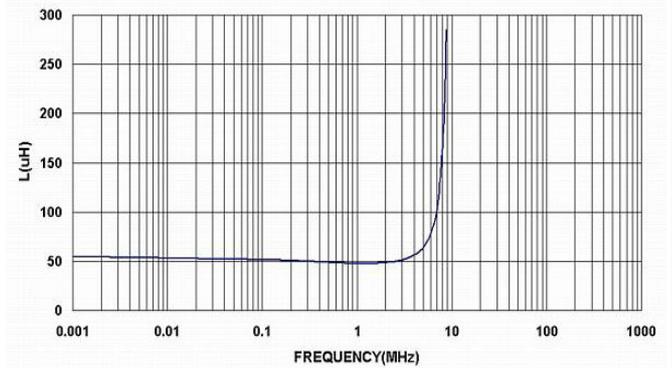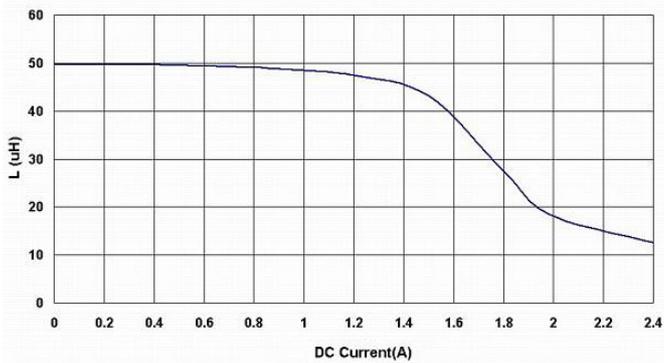

BPSD00080750560□00

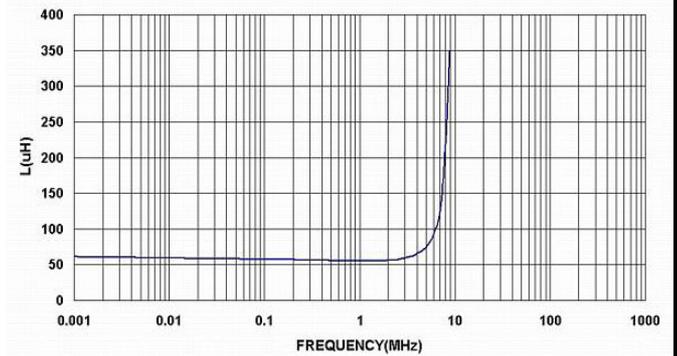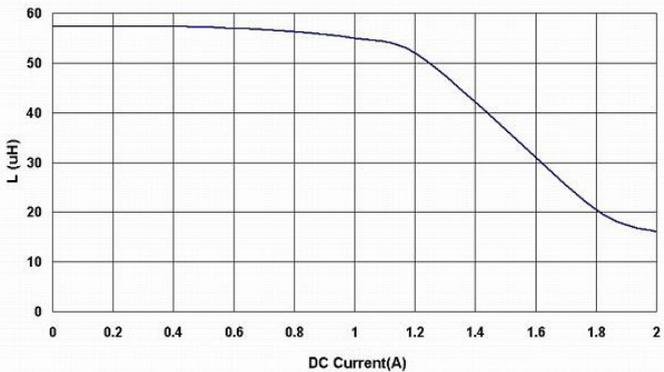



BPSD00080750680□00

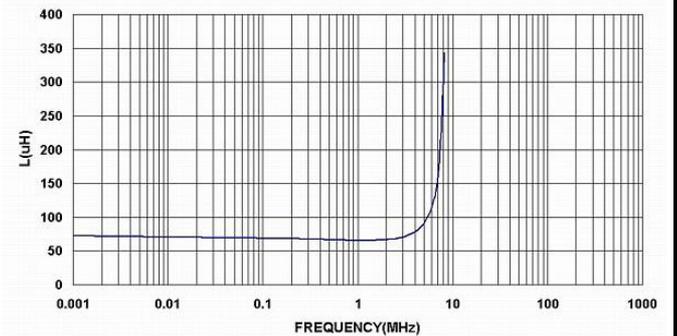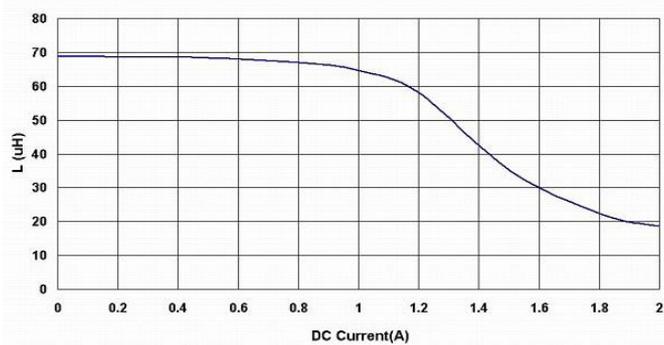



# BPSD00080750 Series Specification

**13** Graph:



BPSD00080750820□00

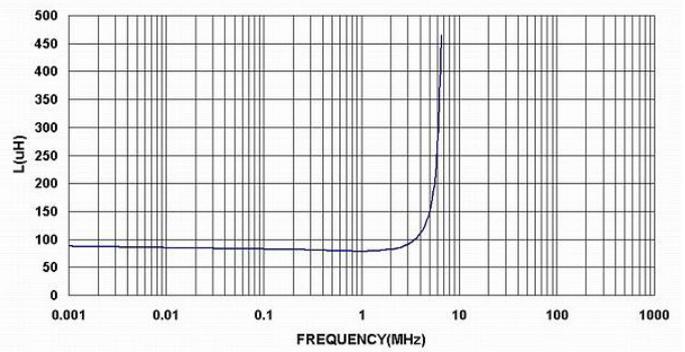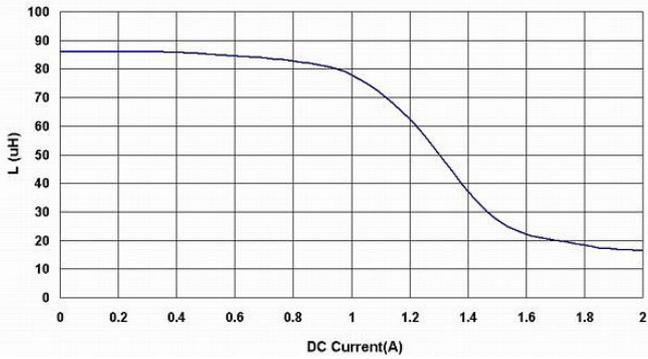



BPSD00080750101□00

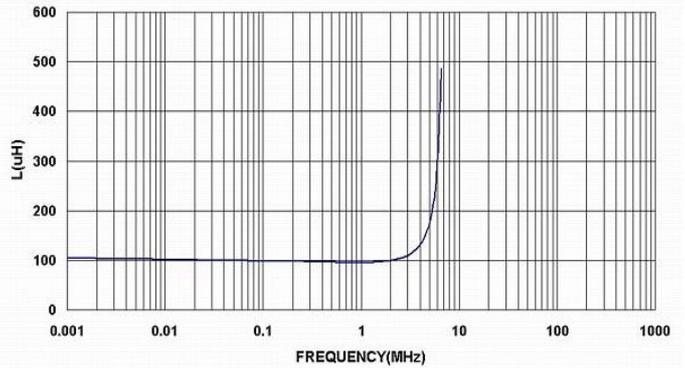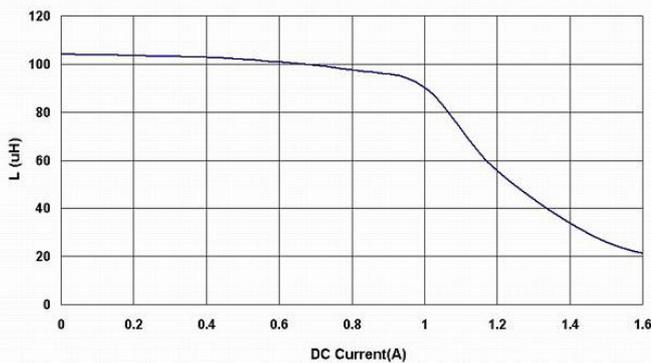

BPSD00080750121□00

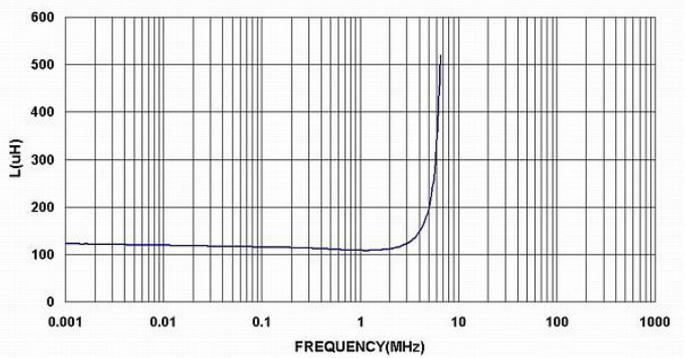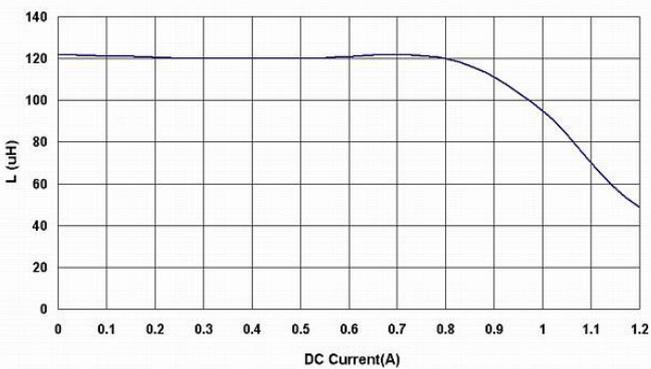



BPSD00080750151□00

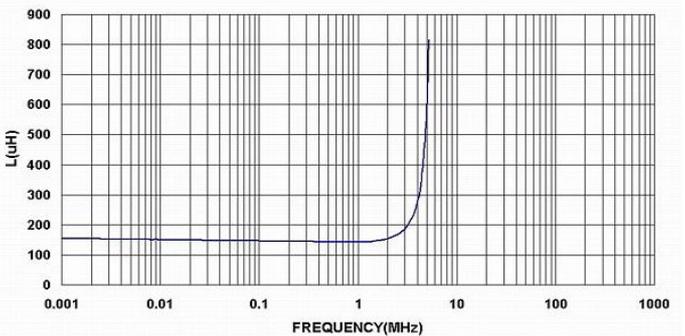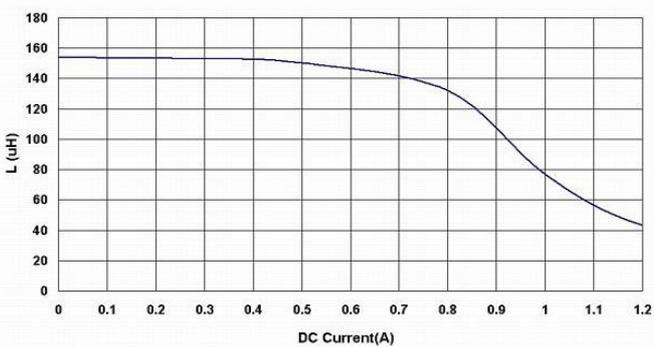



# BPSD00080750 Series Specification

**13** Graph:



BPSD00080750181□00

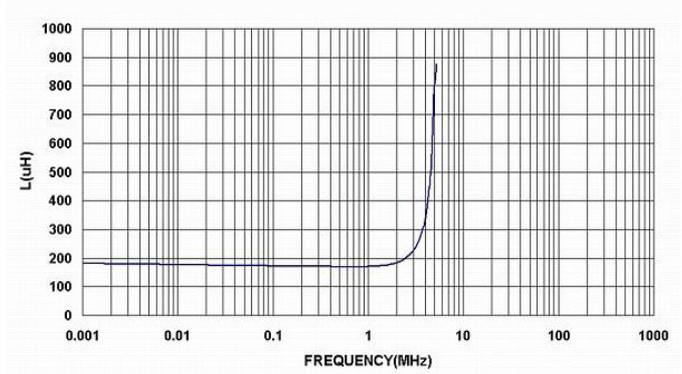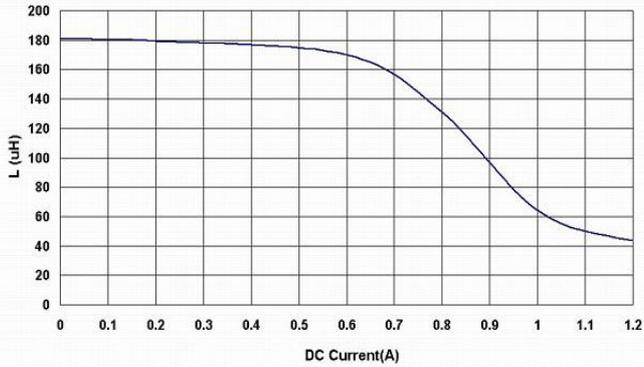



BPSD00080750221□00

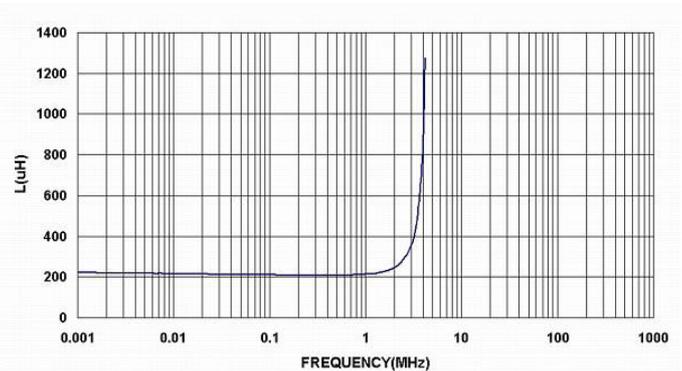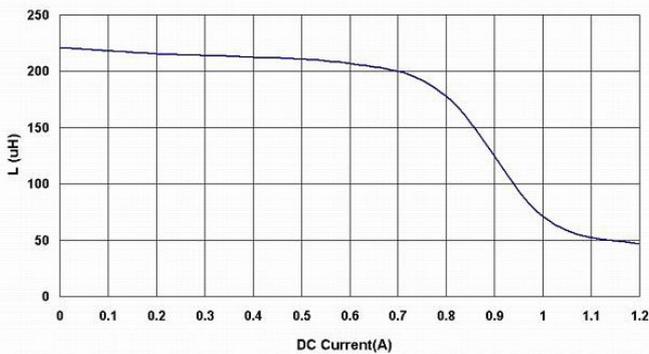

BPSD00080750271□00

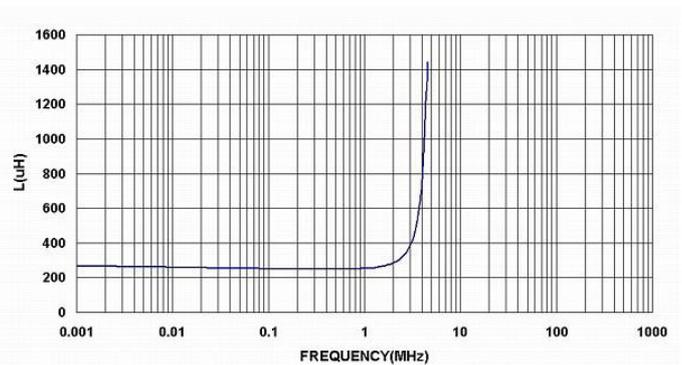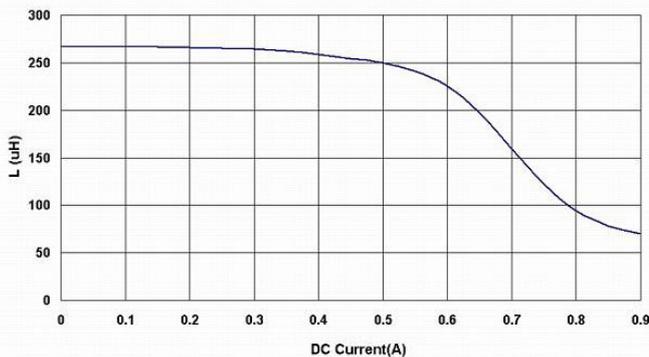



BPSD00080750331□00

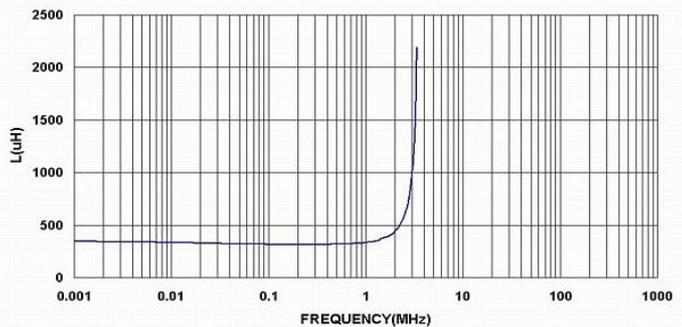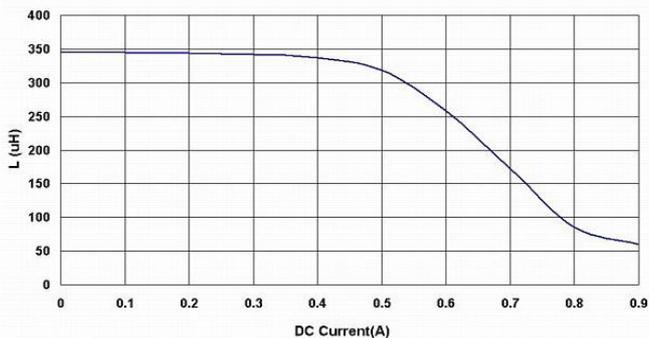

# BPSD00080750 Series Specification

**13** Graph:

BPSD00080750391□00

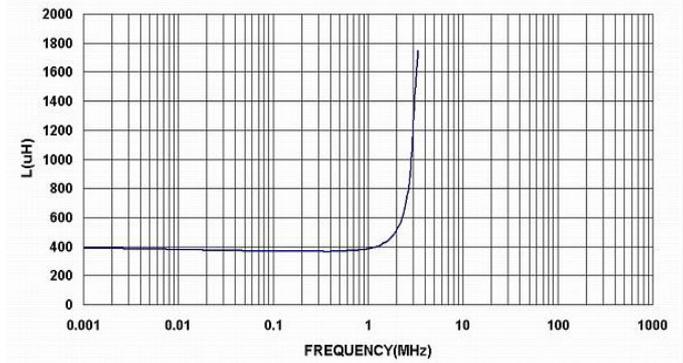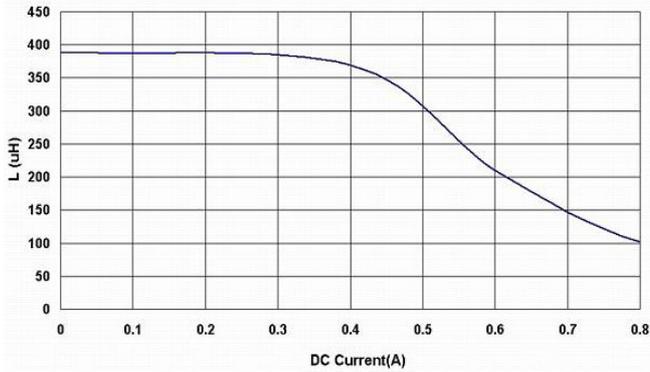

BPSD00080750471□00

