

Power Inductor

Automotive Grade

AMDC Series



Overview

AMDC series Inductors filter the high-frequency switching noise generated by the PWM (Pulse Width Modulation) signals in Class-D amplifiers, ensuring clean audio output. Inductors help in maintaining a stable load for the Class-D amplifier, ensuring optimal performance across varying speaker impedances.

Benefits

- 1. Automotive grade available
- 2. Efficient Filtering of High-Frequency Noise
- 3. 2 in 1 molded power inductors for compact designs for space optimization
- 4. High saturation Current

Applications

- 1. Automotive Audio Systems: Efficient sound systems in cars, including EVs.
- 2. Professional Audio Equipment: Amplifiers for live performances and studio systems.
- 3. Home Audio Systems: High-fidelity home theater systems and smart speakers

Product Information

Series	L (mm)	W (mm)	T (mm)	Inductance (μH)
AMDC	10.2	9.5	10.8	10, 15, 22




AMDC001010J0 Series Specification

AEC-Q200

1 Scope This specification applies to large current and low loss SMD power inductor.

2 Part numbering

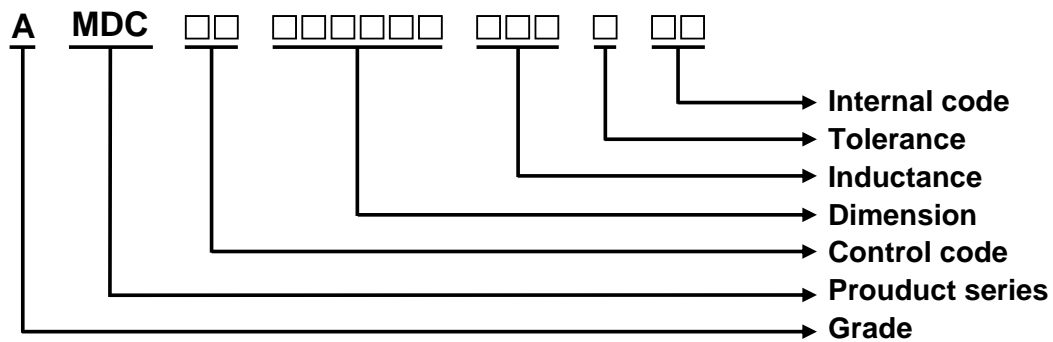


3 Temperature rating

Operating Temperature: -40°C to 125°C.

Storage Temperature: (on tape & reel): -20°C to +40°C; 75% RH max.

4 Marking



Marking : XXX→ Inductance
024→ Year
001→ Week


5 Standard testing condition

	Unless otherwise specified	In case of doubt
Temperature	Ordinary Temperature(15 to 35°C)	20 to 30°C
Humidity	Ordinary Humidity(25 to 85% RH)	50 to 80 %RH

AMDC001010J0 Series Specification

AEC-Q200

6 Configuration and dimensions

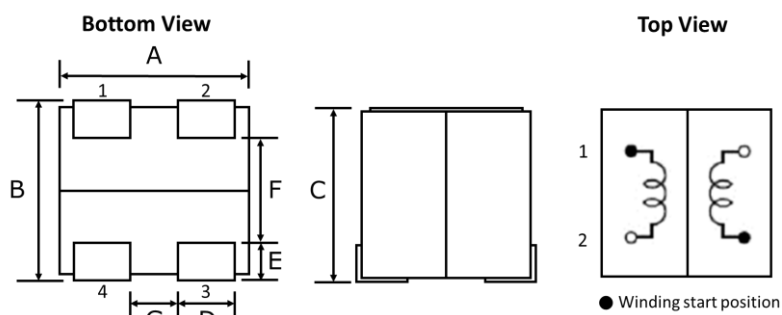

Dimensions in mm

Type	1010J0
A	10.2 ± 0.2
B	9.5 ± 0.2
C	10.85 ± 0.25
D	2.3 ± 0.3
E	2.65 ± 0.2
F	4.0 Typ
G	2.3 ± 0.2

Size Code	Net weight(grms)
1010J0	6.2(typ.)

7 Electrical characteristics

Part number	Inductance (uH)	Tolerance (±%)	Test Freq.	I _{rms} (A) Max.(Typ.)	I _{sat} (A) Max.(Typ.)	RDC (mΩ) Max.(Typ.)	Marking
AMDC001010J0100MQA	10	20	100kHz,0.5V	5.2(5.8)	10(12)	22(18)	100
AMDC001010J0150MQA	15	20	100kHz,0.5V	4(4.5)	7.7(9)	40.8(34)	150
AMDC001010J0220MQA	22	20	100kHz,0.5V	3.2(3.6)	7.3(8.5)	56(46)	220


Note:

- Operating temperature range -40°C to 125°C.
- I_{sat} for Inductance drop 25% from its value without current.
- I_{rms} for a 40°C temperature rise from 25°C ambient.
- The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions. Circuit design 125°C under worst case operating conditions. Component placement, PCB trace size and thickness, airflow and other cooling provisions all affect the part temperature. Part temperature should be verified in the end application.
- Absolute maximum voltage 30V DC. (Based on test method, it may not the same under different application, it is recommended to verify first.)

AMDC001010J0 Series Specification

AEC-Q200

8 AMDC001010J0 Series 8.1 Construction

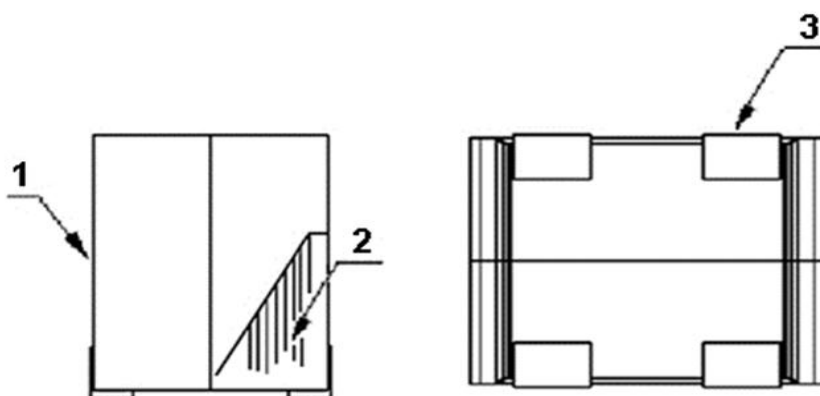

8.2 Material List


Item	Part	Description
1	Magnetic core	Magnetic metal powder
2	Coil	Enameled copper wire
3	Terminals	Copper based terminal

AMDC001010J0 Series Specification

AEC-Q200

9 Reliability test items


1-1.Mechanical Performance

No	Item	Specification	Test Method
1-1-1	Board Flex	The forces applied on the right conditions must not damage the terminal electrode and the ferrite	Refer to AEC-Q200-005 Test device shall be soldered on the substrate Substrate Dimension: 100x40x1.6mm Deflection: 2.0mm Keeping Time: 60sec 
1-1-2	Resistance to Soldering Heat	Appearance: No damage Inductance change shall be within $\pm 10\%$.	Refer to MIL-STD-202 Method 210 Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: $260 \pm 5^\circ\text{C}$ Immersion Time: $10 \pm 1\text{sec}$
1-1-3	Solder ability	The electrodes shall be at least 95% covered with new solder coating	Refer to J-STD-002 Pre-heating: 150°C , 1min Solder Composition: Sn/Ag3.0/Cu0.5(Pb-Free) Solder Temperature: $245 \pm 5^\circ\text{C}$ (Pb-Free) Immersion Time: $4 \pm 1\text{sec}$
1-1-4	Terminal Strength Test	Appearance: No damage	Refer AEC-Q200-006 Soldered on PCB for testing as fig. Force : 1.8kg Keeping Time: 60 seconds.
1-1-5	Resistance to Solvent	There must be no change in appearance or obliteration of marking	Refer to MIL-STD-202 Method 215 Inductors must withstand 6 minutes of alcohol or water. Sample Size : 15 pcs
1-1-6	Vibration	Appearance: No damage Inductance change shall be within $\pm 10\%$.	Refer MIL-STD-202 Method 204 Vibration waveform: Sine waveform Vibration frequency: 10Hz-2000Hz Vibration acceleration: 5g Sweep rate: 0.764386octave/minute Duration of test: 12 cycles each of 3 orientations, 20 minutes for each cycle Vibration axes: X, Y & Z

1-2.Environmental Performance

No	Item	Specification	Test Method
1-2-1	Temperature Cycle	Appearance: No damage Inductance change shall be within $\pm 20\%$	Refer to JESD Method JA-104 Total cycles: 1000 cycles Temperature Cycling Test Conditions : -40 to 125°C -40°C Soak Mode Condition : 30 minutes 125°C Soak Mode Condition : 30 minutes Measured after exposure in the room condition for 24hrs
1-2-2	Biased Humidity Resistance		Refer to MIL-STD-202 Method 103 Temperature: $85 \pm 2^\circ\text{C}$ Relative Humidity:85% / Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-3	High Temperature Exposure (Storage)		Refer to MIL-STD-202 Method 108 Temperature: $125 \pm 3^\circ\text{C}$ / Relative Humidity: 0% Applied Current: Rated Current /Time: 1000hrs Measured after exposure in the room condition for 24hrs
1-2-4	Operational Life		Refer to MIL-PRF-27 Temperature: $85 \pm 3^\circ\text{C}$ Applied Current : Rated Current Time: 1000hrs Measured after exposure in the room condition for 24hrs

10 Recommended IR reflow profile

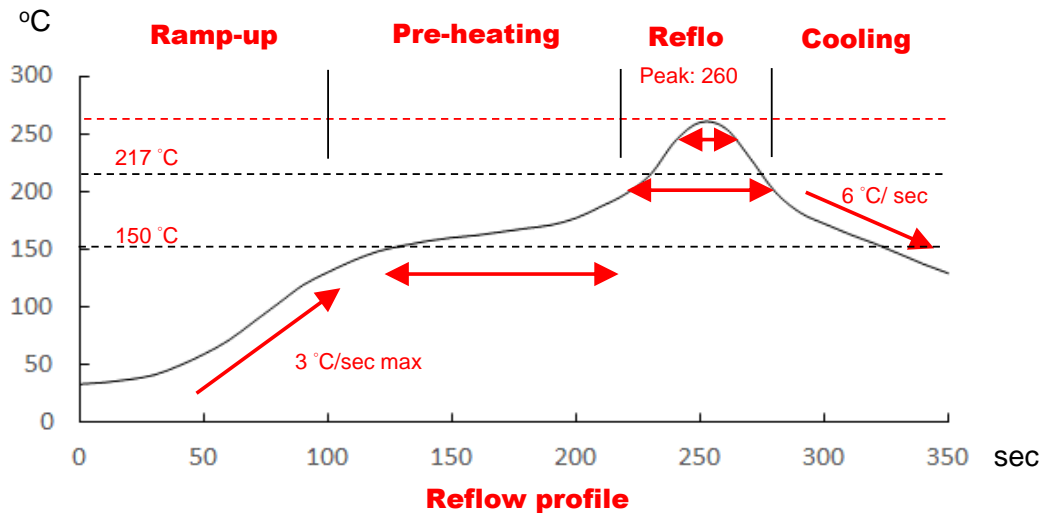

Lead-Free(LF)

Refer to J-STD-020F

Item	Ramp-up	Pre-heating	Reflow	Peak Temp.	Cooling
Temp. scope	R.T. ~150 °C	150 °C~200 °C	217 °C	260±5 °C	Peak Temp. 150 °C
Time spec	-	60~120 sec	60~150 sec	20~40 sec	-

Note:

1. IR reflow times: within 3 times.
2. Nitrogen adopted is recommended while in IR reflow.


AMDC001010J0 Series Specification

AEC-Q200

11 Packaging

11.1 Packaging-cover tape


The force for tearing off cover tape is 10 to 130 grams.

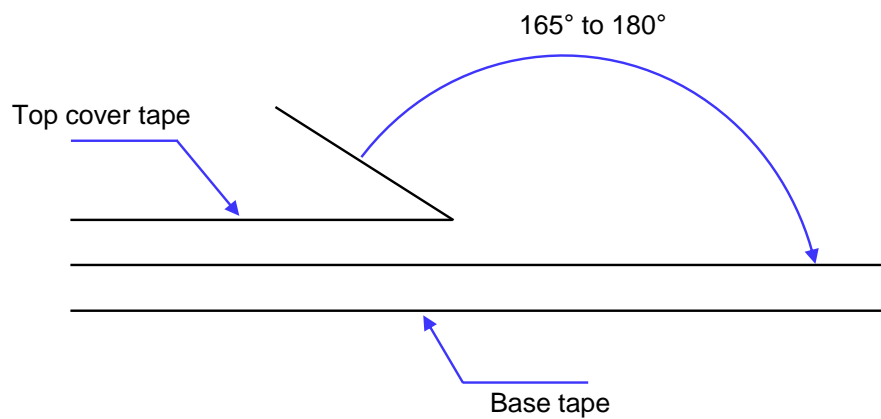

11.2 Packaging quantity

Type	pcs/reel
1010J0	200

11.3 Reel dimensions

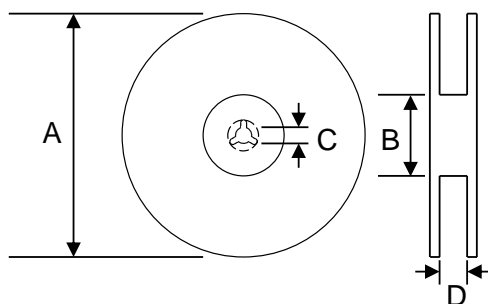

Dimensions in mm


Type	A	B	C	D
1010J0	330	100	13	24

AMDC001010J0 Series Specification

AEC-Q200


11 Packaging

11.4 Tape dimensions in mm

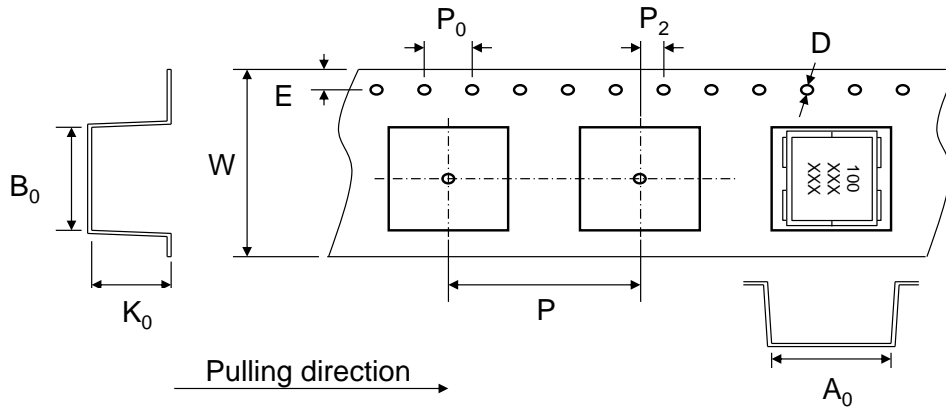

Type	A ₀	B ₀	K ₀	D	E	W	P	P ₀	P ₂
1010J0	9.8	10.8	11.1	1.5	1.75	24	16	4	2

12 Recommended pattern

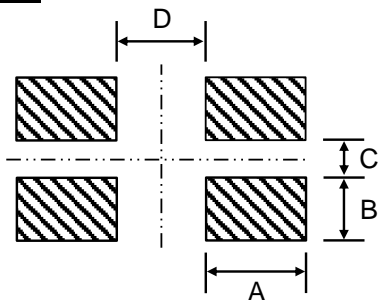

Dimensions in mm

Type	A	B	C	D
1010J0	4.05	2.85	2.1	3.85

13 Note

1. Please make sure that your product has been evaluated and confirmed against your specifications when our product is mounted to your product.
2. Don't design/ mount any components in contact with this product.
3. The moisture sensitivity level (MSL) of products is classified as level 1.
4. Shelf life: 1 years from the date of shipment.

AMDC001010J0 Series Specification

AEC-Q200

14 Graph

